

15-135-28415-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Ness County, Sec. 15 Twp. 19 Rge. (E) 24 (W)

Location as "NE, CN, ESW, W" or other from lines NW NW

Lease Owner Hyde & Bitler

Lease Name H. Fischer Well No. 1

Office Address Box 8316, Prairie Village, Kansas 66208

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed Feb. 17 19 71

Application for plugging filed Nov. 17 19 71

Application for plugging approved 19


Plugging commenced Jan. 16 19 72

Plugging completed Jan. 18 19 72

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

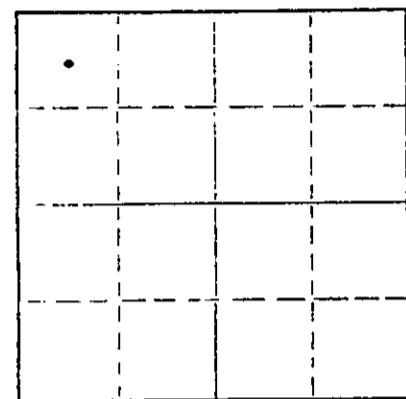

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation Depth to top Bottom Total Depth of Well 4420 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	284'	8 5/8"	284'	none
		0	4419'	5 1/2"	4419'	2550.66

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 4380' and dumped 5 sacks of cement.

Pumped in 3 sacks of hulls, 25 sacks of mud and 120 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 27 1972  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor PIPE PULLERS, INC.  
Address Box 486, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON ss.  
Evelyn Roth (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth  
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 26th day of January, 19 72

My commission expires Feb. 10, 1975 George A. Meyer Notary Public.

DRILLERS LOG

#1 H. Fischer

CASING RECORD:  
284.59' of new 8-5/8"  
surface casing.

COMPANY: Lyde & Bitler  
CONTRACTOR: Strata Drilling, Inc.

DESCRIPTION: NW 1/4  
Section 15-19S-20W  
Ness County, Kansas

TOTAL DEPTH:  
4420'

COMMENCED: February 8, 1971  
COMPLETED: February 17, 1971

ELEVATION: 2315' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Ground, Clay, Post Rock, Sand & Shale	0	306	Ran 284.59' of new 8-5/8" surface casing; set and cemented at 284.59' with 160 sacks of regular cement, 2% gel and 5% C. C. Plug down at 5:00 A. M. February 9, 1971.
Shale w/Sand Streaks	306	565	
Broken Lime, Shells & Shale	565	715	
Sand, Red Bed w/Streaks	715	951	
#1 Anhydrite	951	968	
Red Bed w/Streaks Lime	968	1051	
Dakota Sand	1051	1070	
#2 Anhydrite	1070	1585	
#2 Anhydrite	1585	1625	
Shale & Shells	1625	1980	
Shells, Shale w/Lime Streaks	1980	2261	
Lime & Shale	2261	3803	
Lime	3803	3992	
Lime & Shale	3992	4185	
Lime	4185	4285	
Lime & Chert	4285	4420	

Total Depth 4420'

5 1/2" casing set and cemented at 4419'  
with 175 sacks 60-40 pozmix, salt  
saturated. Plug down at 11:50 P. M.  
February 17, 1971.

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

*Charles W. Steincamp*  
Charles W. Steincamp, President

Subscribed and sworn to before me this 16th day of February, 1971.

My Commission Expires:  
December 14, 1973

*Erlene H. Taylor*  
Erlene H. Taylor, Notary Public