



JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

200 Colorado Derby Building
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

Dear Sir:

Mr. Ben Straily of Ranger Drlg. Co. Inc. has this date requested permission to plug the following described well:

Operator's Full Name: Robert R. Price Operating, Inc.

Complete Address: P.O. Box 45442, Tulsa, Ok. 74145

Lease Name: Frisbie "E" Well No. 1

Location: NE NE SE Sec. 18 Twp. 11 Rge. 18 (E) (W)

County: Ellis Total Depth: 2196'

Abandoned Oil Well Gas Well Input Well SWD Well D&A XXX

Other well as hereafter indicated: _____

Mr. Straily was instructed to plug the well as follows:

OWWO Found 1st plug at 18' from surface, 2nd plug at 94', 3rd plug at 1300'.

Old bid in hole at 2196 had to plug well. 8 5/8" S.P. 92' cuc. w/ common.

Ordered 140 sacks 50/50 posmix-4% Gel.-3% CA1.Cl. & 8 5/8" plug. Spot w/drill stem w/heavy mud between al plugs.


1st plug @ 720' w/80 sacks cement

2nd plug @ 150' w/40 sacks cement

3rd plug-solid bridge of hulls & plug @ 40' w/10 sacks cement.

Circulate 10 sacks in rat hole.

Very truly yours,

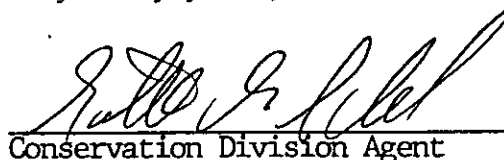

Conservation Division Agent

RECEIVED
STATE CORPORATION COMMISSION

JUL 19 1982

CONSERVATION DIVISION
Wichita, Kansas