

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 12 Twp. 11S Rge. 19 (X) (W)

Location as "NE/CNW/SW" or footage from lines C SW/4 SW/4 SW/4

Lease Owner Walters Drilling Co., Inc.

Lease Name Gasaway Well No. 1

Office Address 510 Orpheum Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 16, 19 52

Application for plugging filed (verbal) June 16, 19 52

Application for plugging approved (verbal) June 16, 19 52

Plugging commenced June 17, 19 52

Plugging completed June 17, 19 52

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty at Hays, Kansas

Producing formation None Depth to top Bottom Total Depth of Well 3590 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
None	None	0	196'	8 5/8"	196'	None
	Cemented with 115 sacks cement					
	No oil string run - dry and abandoned					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug at 195' with 15 sacks cement and 1/2 sack Hulls.

Set top plug at 40' with 10 sacks cement

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Walters Drilling Co., Inc.

Address 510 Orpheum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

ROBERT F. WALTERS (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert F. Walters



510 Orpheum Building, Wichita, Kansas (Address)

June 19 52

Notary Public.



March 10, 1956

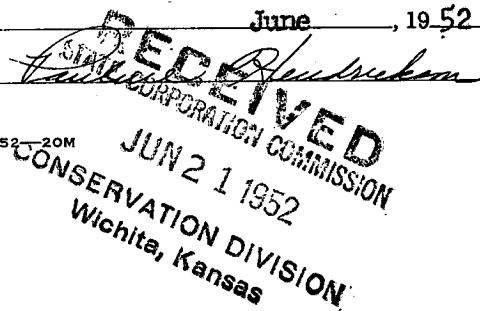

GASAWAY NO. 1

Location:	C SW SW SW Sec. 12-118-19W Ellis County, Kansas	Date Spudded: June 4, 1952
Operator:	Walters Drilling Co., Inc.	Rotary Completion: June 16, 1952
Contractor:	Walters Drilling Co., Inc.	Elevation: 1996 Gr 1999 DF 2001 KB
Surface Casing:	8 5/8" set at 196' with 115 sacks cement and 1 sack Cal. Chloride	
Oil Strings:	None	

L O G

(Figures indicate bottom of formation)

Surface	0 to 196	Geological Formations:	
Shale and Sand	226	Anhydrite	1343
Shale, Sandstone and Iron	673	Topeka	2989
Shale, Shells and Sand	1120	Heebner	3213
Shale and Lime Shells	1343	Lansing-Kansas City	3252
Anhydrite	1390	Base Kansas City	3478
Shale	1420	Conglomerate	3509
Shale and Shells	1635	Simpson	3528
Shale and Lime Shells	1865	Arbuckle	3569
Lime and Shale	3574		
Lime	3578		
Lime and Chert	3590		
Total Depth (Rotary)	3590		

The undersigned, Robert F. Walters, hereby certifies that the above log is a true and correct log of the formations encountered in drilling the above noted well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO., INC.

By Robert F. Walters

Subscribed and sworn to before me
this 18th day of June, 1952.

Pauline Henderson
Notary Public

My commission expires March 10, 1956

PLUGGING
FILE SEC 12-118-19W
25-11

RECORDED
STATE COURT
CONSERVATION DIVISION
Wichita, Kansas