


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

### WELL PLUGGING RECORD

Ellis County, Sec. 12 Twp. 11S Rge. 19 (X) W (W)

Location as "NE/CNW/SW" or footage from lines NE NE NE  
Lease Owner Davis Bros.-Transit Corporation  
Lease Name Gasaway "M" Well No. 1  
Office Address 1516 Liberty Bank Building, Oklahoma City, Okla.  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed December 30, 1959  
Application for plugging filed December 30, 1959  
Application for plugging approved December 30, 1959  
Plugging commenced December 30, 1959  
Plugging completed December 30, 1959  
Reason for abandonment of well or producing formation No production

NORTH

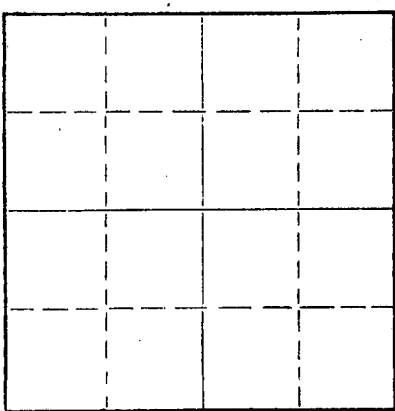

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty-Box 326-Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	180'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy drilling mud to 560'; set plug, cemented with 20 sacks cement.  
Filled hole with heavy drilling mud to 160'; set plug, cemented with 15 sacks cement.  
Filled hole with heavy drilling mud to 40'; set plug, cemented with 10 sacks cement to bottom of cellar.

*RWD  
01-28-60*

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Transit Corporation  
Address 1516 Liberty Bank Building, Oklahoma City, Oklahoma

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.  
Paul E. Gathers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul E. Gathers

(Address)

SUBSCRIBED AND SWORN to before me this 26th day of January, 19 60

Mildred Seam

Notary Public.

My commission expires May 17, 1962.



## DRILLER'S WELL LOG

Davis Bros.-Transit Corporation - Gasaway "M" # 1 well located in  
NE NE NE Section 12-11S-19W  
Ellis County, Kansas

Commenced: December 20, 1959  
Completed: December 30, 1959  
Elevation: 2053' KB

Casing 8 5/8" @ 180'  
Cemented w/115 sacks

<u>Formation</u>	<u>From</u>	<u>To</u>
Rock	0	30
Sand	30	40
Shale	40	85
Sand	85	105
Shale	105	180
Shale and shells	180	670
Shale	670	730
Sand	730	810
Shale	810	853
Pyrite	853	863
Sand	863	1070
Shale and red bed	1070	1395
Anhydrite	1395	1426
Shale	1426	2050
Shale w/lime streaks	2050	2055
Lime	2055	2150
Salt	2160	2175
Lime	2175	2455
Shale w/lime streaks	2455	2555
Lime and shale	2555	2700
Shale and lime streaks	2700	2984
Shale and lime	2984	3015
Lime and shale streaks	3015	3076
Lime and shale	3076	3167
Lime	3167	3548
Lime and chert	3548	3621
Simpson	3621	3634
Lime	3634	3660 TD

Summary of Formation

Anhydrite	1390'
Topeka	3047'
Heebner	3269'
Toronto	3284'
Lansing	3309'
Base of K.C.	3532'
Conglomerate	3555'
Simpson	3611'
Arbuckle	3634'

**RECEIVED**  
STATE CORPORATION COMMISSION

JAN 28 1960


CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify the foregoing to be a true and accurate Driller's Log of the formation encountered in the above well.

TRANSIT CORPORATION

BY Paul E. Gachter

Mildred Isom  
Notary Public



Subscribed and sworn to before me  
this 26th day of January, 1960.

My Commission expires May 17, 1962.