


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

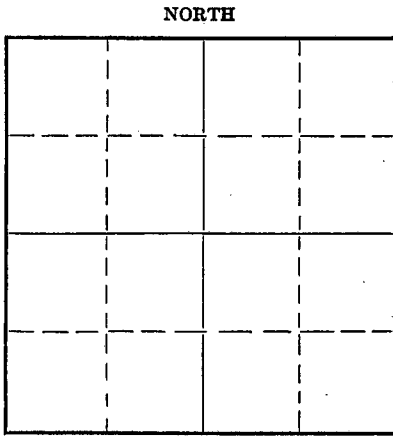

Locate well correctly on above
Section Plat

Ellis County. Sec. 10 Twp. 11 Rge. 19 (E) (W) (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NE SW
Lease Owner Okmar Oil Company
Lease Name Albert Well No. 4
Office Address 817 Union National Bank Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5/5/54 19
Application for plugging filed 5/15/54 19
Application for plugging approved 5/15/54 19
Plugging commenced 6/1/54 19
Plugging completed 6/11/54 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3619 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				5 1/2	3616'	2329'
				8 5/8	177'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugging Information:

3621 to 3580 ft. 6 sks. cement.
3580 to 180 ft. Mudded.
180 to 170 ft. Rock Bridge.
170 to 120 ft. 20 sks. cement.
120 to 30 ft. Mud.
30 ft. to cellar 10 sks. cement.


(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Okmar Oil Company
Address 817 Union National Bank Building
Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Robert M. Beren (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert M. Beren
817 Union National Bank Building
Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 16th day of September 1954.
My commission expires January 9, 1957



Notary Public
STATE CORPORATION COMMISSION

PLUGGING
FILE SEC 10 T 11 R 19W
BOOK PAGE 40 LINK 3

SEP 17 1954
CONSERVATION DIVISION
Wichita, Kansas

Trans Era Petroleum, Inc.
Albert #4

NW NE SW 10-11-19
Ellis County, Kansas

Total depth: 3612'
Comm. 4/22/54
Comp. 5/5/54

Casing

8 5/8" Set @ 177'
5 1/2" Set @ 3616'

Cement

200 sacks Lone Star
175 sacks Reg.

Formation	Depth
Clay-shells	130
Shale-shells	515
Shale-sand	1153
Shale	1180
Shale-red bed	1400
Anhydrite	1440
Shale	1600
Lime-shells-shale	1955
Lime-shale	2330
Lime	2470
Lime-shale	3005
Lime	3120
Lime-shale	3185
Lime	3608
Conglomerate	3609
Lime	3612'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

Caro Betty

Subscribed and sworn to before me this 10th day of May, 1954.

Margie Cooper
Notary Public



commission expires: 1-30-57.

PLUGGING
FILE SEC 10 T 11 R 1911
BOOK PAGE 40 LINE 3

ST. SIGHT