


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

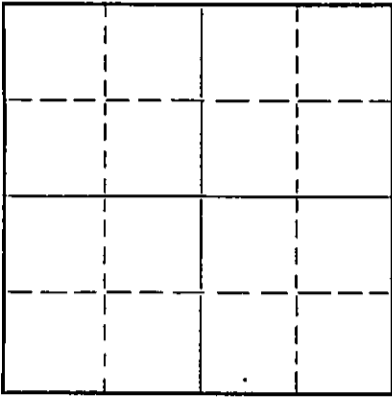

Locate well correctly on above Section Plat

.....Ellis.....County. Sec. 35 Twp. 11 Rge. 19 (EX) (W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines SE SE SW
Lease Owner Graham-Messman-Rinehart Oil Company
Lease Name Jensen Well No. #1
Office Address 204 North Market, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry
Date well completed July 10 19 50
Application for plugging filed July 11 19 50
Application for plugging approved July 12 19 50
Plugging commenced July 10 19 50
Plugging completed July 10 19 50
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3730 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	137'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Heavy mud to 135'
Set plug at 135'
Run 15 sacks cement mudded to 35'
Set plug at 35'
Run 10 sacks cement to surface

7-14-50

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Graham-Messman-Rinehart Oil Company
Address 204 North Market, Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
J. A. Gilliland.....(employee of owner) or (~~notary public~~) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. A. Gilliland
204 North Market, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of July, 19 50

My commission expires 11-16-53

Virginia M. Boyce
Notary Public.



WELL RECORDJULY 11

Location: SE SE SW
Section 35-11S-19W
Ellis County, Kansas

Commenced: June 27, 1950
Completed: July 10, 1950

Operator: Graham-Messman-Rinehart Oil Company
204 North Market
Wichita, Kansas

Elevation: 2136 D.F.
Production: D & A

Contractor: Graham-Messman-Rinehart Oil Company
Same

Casing Record: Set 137' 8 5/8" surface pipe
Cemented same with 90 sks regular and
2 sks c. cement.

LOG

(Figures indicate bottom of formation)

Surface Clay	137		
Shale	730		
Sand	765		
Sandstone	775		
Shale and shells	880		
Sand	1170		
Shale	1888		
Anhydrite	1530	<u>TOPS</u>	
Shale and shells	1930		
Shale	2055	Anhydrite	1488
Shale and lime	2175	Lansing	3445
Lime and shale	2820	Simpson Dolomite	3690
Shale and lime	2900	Arbuckle	3705
Shale and shells	3045		
Shale and lime	3145		
Lime	3730		
Total Rotary Depth	3730		

The undersigned, GRAHAM-MESSMAN-RINEHART OIL COMPANY, hereby certifies that the above log is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

GRAHAM-MESSMAN-RINEHART OIL COMPANY

By

J. A. Gilliland

Subscribed and sworn to before me this
13th day of July, 1950.

Thomas M. Roy
Notary Public

My Commission Expires: 11-16-53

Copy - Kansas Well Log Bureau
508 E. Murdock
Wichita, Kansas

