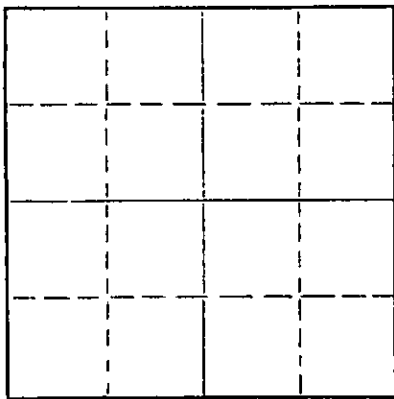


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ness County. Sec. 18 Twp. 18S Rge. (E) 24 (W)

NORTH



Locate well correctly on above Section Plat

Location as "NE/CNW/SE/SW" or footage from lines C NE NE
Lease Owner O. A. Sutton
Lease Name Dinges Well No. 1
Office Address 407 Insurance Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 18 19 64
Application for plugging filed May 18 19 64
Application for plugging approved May 18 19 64
Plugging commenced May 18 19 64
Plugging completed May 18 19 64
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4 450 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	273	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug @ 650', cemented with 25 sacks, done by pump truck.
2nd plug @ 265', 1/4 sack hulls and 20 sacks cement. 3rd plug @ 40', 1/4 sack hulls and 15 sacks cement. Complete at 10:00 p.m. 5-18-64.

RECEIVED
STATE CORPORATION COMMISSION

JUN 3 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones Inc.
Address 514 Orpheum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
E. E. Wible (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. E. Wible
E. E. Wible
407 Insurance Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of June, 19 64

My commission expires June 28, 1966.
Jean S. Taylor
Jean S. Taylor - Notary Public.



15-135-00359-0000

GABBERT-JONES INC.
WICHITA, KANSAS
DRILLERS WELL LOG

R

DINGES #1
C NE NE SECTION 18-18S-24W
NESS COUNTY, KANSAS

COMMENCED: MAY 6, 1964
COMPLETED: MAY 18, 1964

OPERATOR - O. A. SUTTON

DEPTH		FORMATION	REMARKS
FROM	TO		
0	60	SURFACE SOIL & SAND	
60	200	SAND, SHALE & SHELLS	
200	273	SHALE	RAN 8 JOINTS 8-5/8" CASING, SET @ 273' W/ 190 SACKS CEMENT
273	575	CLAY	
575	1210	SHALE & SAND	
1210	1585	SAND, SHALE & LIME	
1585	1618	CLAY, SHALE	
1618	1653	ANHYDRITE	
1653	2155	SHALE & SHELLS	
2155	2370	LIME & SHALE	
2370	2845	LIME	
2845	2975	SHALE & LIME	
2975	3075	LIME	
3075	3210	CHALK, BROKEN LIME	
3210	3815	SHALE & LIME	
3815	4450	LIME	
4450	TD		


NOTARIAL PUBLIC
STATE COMMISSION COMMISSIONER

JUN 1 1964

CONSERVATION DIVISION
WICHITA, Kansas

DRY & ABANDONED


I, E. E. HALL, CERTIFY THIS IS A CORRECT COPY OF THE DRILLER'S LOG FOR THE WELL DRILLED IN C NE NE SECTION 18-18S-24W, NESS COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.


E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE ON THIS 20TH DAY OF MAY, 1964, PERSONALLY APPEARED E. E. HALL TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.


VERA A. MCKENZIE, NOTARY PUBLIC

MY COMMISSION EXPIRES OCTOBER 2, 1967