


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

15-051-03864-0001

NORTH

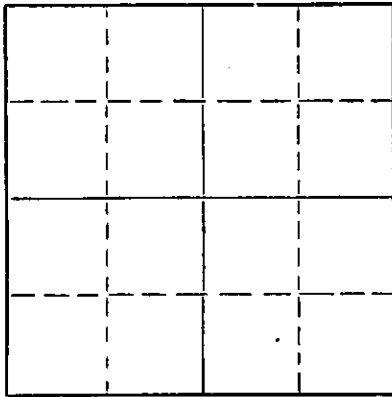

Locate well correctly on above
Section Plat

Ellis County. Sec 5 Twp. 11 Rge. 20 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner John Lindas Oil, Inc.
Lease Name Fischer Well No. 1
Office Address 1316 Union National Bank Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 18 19 52
Application for plugging filed December 17 19 52
Application for plugging approved December 17 19 52
Plugging commenced December 18 19 52
Plugging completed December 18 19 52
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Elden Petty
Producing formation Depth to top Bottom Total Depth of Well 3751 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3751	1833'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back with crushed rock from 3561' to 3320',
Dumped 5 sacks cement. at 3320' with dump bailer, top of
cement 3285'. Filled hole with mud from 3285' to 200'. Set rock
bridge, dumped 15 sacks cement, top of cement 155'. Filled
hole with mud to 35', set rock bridge, dumped 10 sacks
of cement for cap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J. & M. Casing pulling Company.
Address P. O. Box 711, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
I, Dale Thomas (employee of owner) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Thomas

1316 Union Nat'l. Bank Bldg. Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December, 19 52


My commission expires October 8, 1955

Edward W. Evans
Notary Public.

24-2675-6

2-52-20M

12-30-52



WICHITA, KANSAS

RE-WORK DRILLING LOG

Lease Operator: John Lindas Oil, Inc.
 1316 Union National Bank Building
 Wichita 2, Kansas

County: Ellis
 Location: E/2 SW/4 and
 W/2 SE/4
 Section: 5-11S-20W

Well: Fischer No. 1

Rotary Total Depth: 3750'
 Commenced: October 28, 1952
 Completed: November 1, 1952
 Oil String: 5-1/2" @ 3750'
 with 100 sacks cement.

Contractor: John Lindas Oil, Inc.
 1316 Union National Bank Building
 Wichita 2, Kansas

STATE OF KANSAS)
 : ss
 COUNTY OF SELWICK)

I, the undersigned, being duly sworn upon oath, state that the above statement and log is a true and correct record of the well drilled by John Lindas Oil, Inc., at the location above described.

Edward W. Wiens

Subscribed and sworn to before me this 4th day of November, 1952.

Catherine Dancy
 Notary Public

My Commission expires: March 25, 1956.

