


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

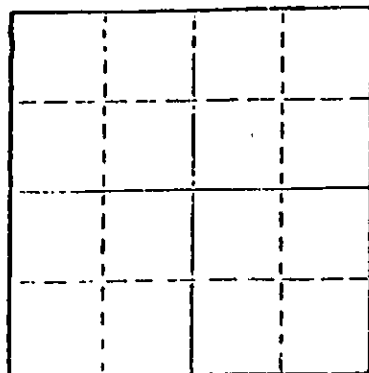

Locate well correctly on above
Section Plot

Rush County, Sec. 14 Twp. 17S Rge. 16 XX/W
Location as "NE/CNW/SW" or footage from lines
NW/4 SE/4 SW/4 150' W

Lease Owner Lebsack Oil Production, Inc.
Lease Name Hanhardt Well No. #1
Office Address P.O. Box 489, Hays, KS 67601
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed 6-27 1981
Application for plugging filed 6-27 1981
Application for plugging approved 6-27 1981
Plugging commenced 6-27 1981
Plugging completed 6-27 1981
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation Depth to top Bottom Total Depth of Well 3645'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	290'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.


Mud laden fluid 3645' to 680'
65 sx cement @ 680'
30 sx cement @ 330'
10 sx cement @ 40'
5 sx cement in Rat Hole

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Ranger Drilling Company, Inc.
P.O. Box 717, Hays, Kansas 67601

STATE OF KANSAS COUNTY OF ELLIS
William A. Spivey (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) William A. Spivey
P.O. Box 717, Hays, Kansas 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 1981



My commission expires

Brenda J. Chippindale
Notary Public.

RANGER DRILLING COMPANY, INC.

P.O. Box 717

Hays, Kansas 67601

913/625-4210

DRI-LLERS LOG

OPERATOR: Lebsack Oil Production, Inc.
P.O. Box 489
Hays, Kansas 67601

CONTRACTOR: Ranger Drilling Company, Inc.
P.O. Box 717
Hays, Kansas 67601

LEASE: Hanhardt

WELL: #1

LOCATION: NW/4 SE/4 SW/4 150' W
Section 14-17S-16W
Rush County, Kansas

Total Depth: 3645'

Elevation: 2033' G.L.

Commenced: 6-19-81

Completed: 6-27-81

Casing: 8-5/8" @ 290'.

Status: Dry Hole

DEPTHS AND FORMATIONS

(All measurements from K.B.)

Surface soil and clay	295	Shale and shells	1850
Shale	855	Lime and shale	2323
Shale and Red Bed	1112	Shale	2490
Anhydrite	1137	Lime and shale	3645
Shale and Red Bed	1200	T.D.	3645

STATE OF KANSAS)
 ss.
COUNTY OF ELLIS)


RECEIVED
STATE CORPORATION COMMISSION
JUL - 2 1981
CONSERVATION DIVISION
Wichita, Kansas

I, William A. Spivey, of the Ranger Drilling Company, Inc., state that the above and foregoing is a true and correct log of the above captioned well.

William A. Spivey
William A. Spivey

Subscribed and sworn to before me this 29th day of June, 1981.

My Commission Expires _____



Brenda J. Chippindale
Notary Public