


JAN 17 1975

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

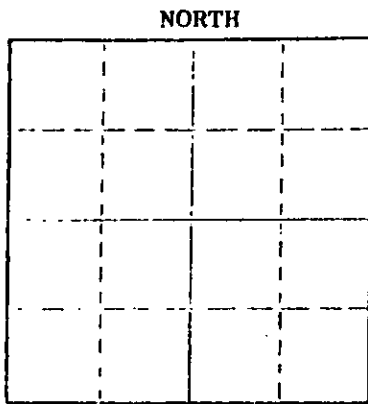

Locate well correctly on above
Section Plat

Ness County. Sec. 32 Twp. 18 Rge. 26 (E) (W)
Location as "NE/CNW/SW" or footage from lines 100' S C SW NE
Lease Owner Tomlinson Oil Co., Inc.
Lease Name Reeves #1 Well No.
Office Address Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 12/30/74 19
Plugging completed 1/8/75 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation Depth to top Bottom Total Depth of Well 4525 ft
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	347	none
				5 1/8"	4502	2664'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran sand to 4475' and ran 4 sacks cement. Shot pipe at 2830',
29 2797', 2735', 2700', 2660', worked pipe loose and pulled 83
joints. Pumped 20 sacks gel, 80 sacks cement, 6 sacks gel and
20 sacks cement.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS

SUBSCRIBED AND SWORN to before me this 10th day of January 1975

My commission expires

Margaret Melcher
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
1.16.1975
CONSERVATION DIVISION
Wichita, Kansas

WELL LOG

TOMLINSON OIL CO., INC.
Suite 1030, 200 W. Douglas
Wichita, Kansas 67202

#1 REEVES
100' S C SW NE Sec. 32-18-26W
Ness County, Kansas

CONTRACTOR: Chief Drilling Co., Inc.
CASING RECORD: Set 347' 8 5/8" w/225 sacks
Sunset Cement; 4502' 5 1/2"
w/275 sacks 50-10 Posmix 2%
gel

COMMENCED: 9/24/74
COMPLETED: 10/4/74

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Rat Hole	0	357	2544 Gr.
Shale & Shells	357	1269	2546 D.F.
Shale & Sand	1269	1850	2549 K.B.
Shale & Shells	1850	1890	
Anhydrite	1890	1926	
Shale	1926	2336	
Shale & Shells	2336	2640	
Shale	2640	2857	
Shale & Shells	2857	2990	
Shale	2990	3360	
Shale & Lime	3360	3585	
Lime	3585	3760	
Lime & Shale	3760	4015	
Lime	4015	4495	
Total Depth	4503		

FORMATION TOPS

Anhydrite 1890 + 659
Base Anhy. 1926 + 623
Heebner 3859 - 1310
Lansing 3899 - 1350
Ft. Scott 4424 - 1875
Cher. Shale 4448 - 1899
Cher. Sand 4500 - 1951
R.T.D. 4503 - 1954

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C SW NE of Section 32-18-26W, Ness County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson

Jim Robinson, Vice President

Subscribed and sworn to before me this 15th day of October, 1974.

Virginia S. Fabian
Virginia S. Fabian, Notary Public

