


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 5 Twp. 20S Rge. 21W /#W
Location as "NE/CNW/SW" or footage from lines
150' South of C SE/4 SE/4

Lease Owner Topper Resources
Lease Name North Well No. 1
Office Address 300 Farmers & Bankers Bldg, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)
D & A

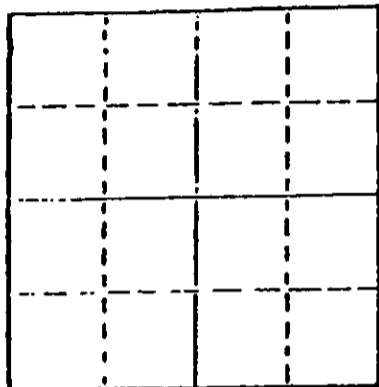

Locate well correctly on above
Section Plot

Date Well completed December 8, 1978
Application for plugging filed December 8, 1978
Application for plugging approved December 8, 1978
Plugging commenced December 8, 1978
Plugging completed December 8, 1978
Reason for abandonment of well or producing formation
D & A

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 4,480'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	388'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Plugged w/70' sx cement @ 550'
20' sx cement @ 300'
10' sx cement w/bridge @ 40'
(50-50 Pozmix, 6% Gel)

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202


STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~xxxxxx~~)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of December, 1978.

Joyce A. Hagermann
Notary Public.

My commission expires



15-135-21539-0000

DRILLERS LOG

No. 1 NORTH

CASING RECORD:

COMPANY: Topper Resources

DESCRIPTION:

8 5/8" @ 388'
w/250 sx cement

CONTRACTOR: Red Tiger Drilling Company

150' S of C SE/4 SE/4
Sec. 5-T20S-R21W
Ness County, Kansas

COMMENCED: November 28, 1978

COMPLETED: December 8, 1978

TOTAL DEPTH: 4,480'

ELEVATION: 2,281' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Post Rock	0	220	
Shells & Shale	220	389	
Shale	389	555	
Sand	555	655	
Shale	655	836	
Post Rock	836	841	
Shale	841	932	
Sand	932	1150	
Shale	1150	1496	
Anhydrite	1496	1529	
Shale	1529	2215	
Shale & Lime	2215	2785	
Lime & Shale	2785	3925	
Lime	3925	4458	
Lime & Chert	4458	4480	
RTD		4480	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 11th day of December, 1978.

Joyce A. Hagermann



RECEIVED
STATE DEPARTMENT OF REVENUE

DEC 13 1978

CONSERVATION
11/11/78