

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
200 Colorado Derby Building  
Wichita, Kansas 67202

FORM CP-1  
Rev. 03/92

WELL PLUGGING APPLICATION FORM  
(PLEASE TYPE FORM and File ONE Copy)

API # 15-135-20668-0000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date. 6/98

WELL OPERATOR Pickrell Drilling Co., Inc. KCC LICENSE # 5123  
(owner/company name) (operator's)

ADDRESS 110 N. Market -- Suite 205 CITY Wichita  
STATE Kansas ZIP CODE 67202 CONTACT PHONE # (316) 262-8427

LEASE Nelson B Norton B WELL# 4 SEC. 12 T. 18S R. 26 (E/W/West)  
C - W/2 - SW - NW SPOT LOCATION/QQQQ COUNTY Ness

3630 FEET (in exact footage) FROM S N (circle one) LINE OF SECTION (NOT Lease Line)  
4620 FEET (in exact footage) FROM E W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL  GAS WELL  D&A  SWD/ENHR WELL  DOCKET#           

CONDUCTOR CASING SIZE            SET AT            CEMENTED WITH            SACKS  
SURFACE CASING SIZE 8 5/8 SET AT 248 CEMENTED WITH 150 SACKS  
PRODUCTION CASING SIZE 5 1/2 SET AT 4482 CEMENTED WITH 200 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: Open Hole 4482 -- 4492

ELEVATION 2518 KB T.D. 4492 PBDT 4492 ANHYDRITE DEPTH 1849  
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD  POOR  CASING LEAK  JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Use 60/40 Poz 6% gel for plugging. Plug back w/sand to 4400'.

Use dump bailer to spot 5 sx Cmt. on top of sand. Cut & recover casing. As pull casing from hole spot 50 Sx @ 1850, 80 Sx @ 1100, 40 Sx @ 600, 40 Sx @ 270. Fill casing from surface. Tie into 8 5/8 x 5 1/2 annulus and attempt to squeeze cement.  
(If additional space is needed attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? No IS ACO-1 FILED? Yes

If not explain why? Well does not have an electric log.

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:  
Ed Mondero PHONE# (913) 798-2430

ADDRESS P. O. Box 375 City/State Ness City, KS 67560

PLUGGING CONTRACTOR Kelso Casing Pulling, Inc. KCC LICENSE # 31528 9/98  
(company name) (contractor's)  
ADDRESS P. O. Box 467, Chase, KS 67524 PHONE # (916) 938-2943

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 06-26-98

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 06-25-98 AUTHORIZED OPERATOR/AGENT: Jack Gurley  
(signature)  
Jack Gurley

*Rec'd  
6-25-98*



## Kansas Corporation Commission

Bill Graves, Governor John Wine, Chair Susan M. Seltsam, Commissioner Cynthia L. Claus, Commissioner

### NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

June 29, 1998

Pickrell Drilling Co, Inc.  
110 N. Market, Suite 205  
Wichita, Ks. 67202

Norton B #4  
API 15-13520668-0000  
C W/2 SW NW  
Sec. 12-18S-26W  
Ness County

Dear Prickrell Drilling,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely,  
A handwritten signature in cursive script, appearing to read "David P. Williams".

David P. Williams  
Production Supervisor

District: #1  
304 W. McArtor  
Dodge City, KS 67801  
(316) 225-8888

BAKER SERVICE TOOLS - TALLY PAD

15-135-20668-0000

New Completion  Workover

Location B

Oil Company \_\_\_\_\_

Well No. 4

Field \_\_\_\_\_


Lease Nelson B

Company Man \_\_\_\_\_

Date Drilled 3/73

County Ness

State Kansas

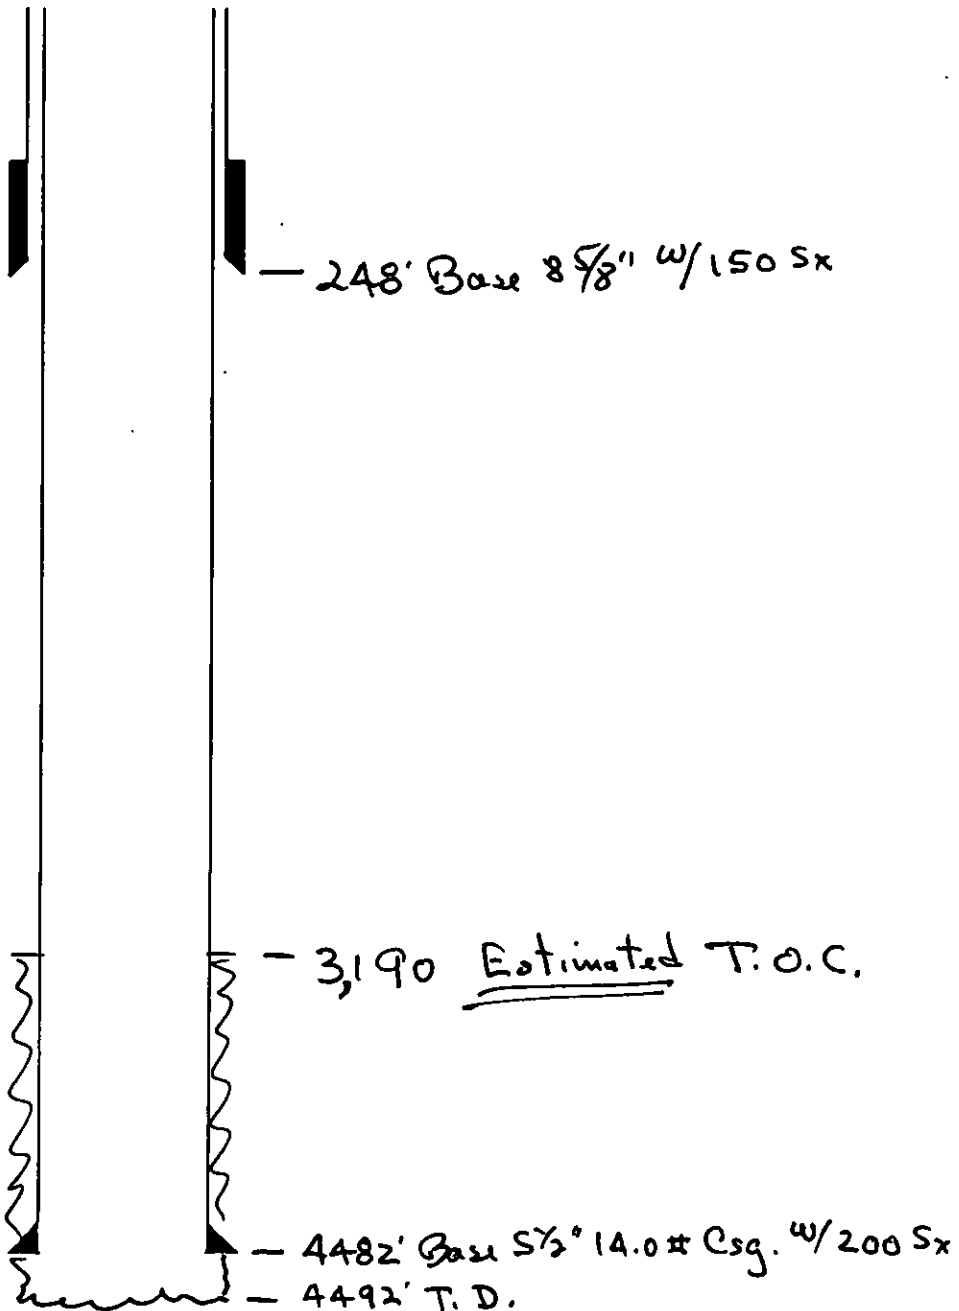

- 248' Base 8 5/8" w/150 Sx

- 3,190 Estimated T.O.C.

- 4482' Base 5 1/2" 14.0# Csg. w/200 Sx

- 4492' T.D.

REMARKS:

Completion from open hole 4482-4492  
Top of Anhydrite = 1849 ft.

15-135-20608-0000

PICKRELL DRILLING COMPANY, INC.

110 NORTH MARKET - SUITE 205

WICHITA, KANSAS 67202-1996

(316) 262-8427

# Fax

(KCC)

To: Steve Middleton From: Jack Gurley  
Fax: 225-8885 Pages: 4 w/ cover  
Phone: Date: 6-26-98  
Re: P&A Norton B-4 CC:

Urgent  For Review  Please Comment  Please Reply  Please Recycle

• Comments:

Steve →

This is to correct the well name on the P&A App. sent you yesterday P.M.

from Nelson B-4 to Norton B-4.

Everything else is correct. See corrections on attached.

Jack Gurley

cc: KCC - Wichita (337-6211) ✓  
Kelso Csg Pulling (938-2945)  
Danny Biggs (PDC)

15-135-20668-0000

PICKRELL DRILLING COMPANY, INC.

110 NORTH MARKET - SUITE 205

WICHITA, KANSAS 67202-1996

(316) 262-8427

# Fax

To: Steve Middleton (KCC) From: Jack Gurley  
Fax: 225-8885 Pages: 3 w/cover  
Phone: Norton B-4 Date: 6-25-98  
Re: P&A Nelson B-4 CC:

Urgent  For Review  Please Comment  Please Reply  Please Recycle

• Comments:

Steve →

Application to P&A our Norton B-4  
as per phone conversation this P.M.

Jack Gurley

cc: KCC - Wichita (337-6211)

Kelso Csg Pulling (938-2945)

Danny Biggs (PDC)