


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Ness County, Sec. 12 Twp. 18s Rge. 26W X/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
NW NW SW

Lease Owner Kansas Oil Corporation
Lease Name Moses Trust Well No. 2
Office Address 400 N. Woodlawn, Wichita, Kansas 67208
Character of Well (Completed as Oil, Gas or Dry Hole)

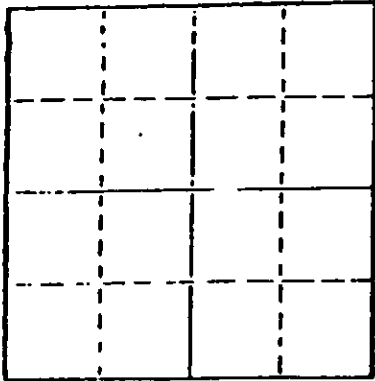

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed 5-8-79 19
Application for plugging filed 5-8-79 19
Application for plugging approved 5-8-79 19
Plugging commenced 5-8-79 19
Plugging completed 5-8-79 19
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production
N/A 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4498
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand				8 5/8"	290'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plugged: 70sx 550'
20sx 280'
10sx 40'
5sx RH

50-50 PAZ 50% gel

5-15-79

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Service Company

STATE OF Kansas COUNTY OF Sedgwick, ss.
Paul A. Seymour, Jr. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Paul A. Seymour, Jr.
Box 8287, Munger Station, Wichita, KS 67208
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of May, 19 79

Ruth M. Bassett
Ruth M. Bassett Notary Public.

My commission expires May 30, 1979

15-135-21610-0000

BIG SPRINGS DRILLING, INC.

P.O. BOX 8287
MUNGER STATION
WICHITA, KANSAS 67208

SUITE 29 • 400 NORTH WOODLAWN • (316) 681-1732

May 11, 1979

DRILLERS LOG

Re: Moses Trust No. 2
NW NW SW
Sec. 12 - Twp 18s - Rq 26W
Ness County, Kansas

OPERATOR: Kansas Oil Corporation
CONTRACTOR: Big Springs Drilling, Inc.
COMMENCED: 4-25-79
COMPLETED: 5-8-79

0	290	Sand and Shale
290	1242	Clay, Sand and Shale
1242	1255	Blaine Anhydrite
1255	1854	Shale
1854	1885	Anhydrite
1885	3120	Shale
3120	3941	Shale and Lime
3941	4111	Lime and Shale Stks.
4111	4498	Lime
4498		RTD


1979
MAY 11 1979

We certify that the above and foregoing is a true and correct copy of the log on the # 2 Moses Trust located in Ness County, Kansas.

BIG SPRINGS DRILLING, INC.


Paul A. Seymour, Jr.

Subscribed and sworn to before me this 11th day of May, 1979.


Ruth M. Bassett Notary Public

My Commission Expires

May 30, 1979