


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County. Sec. 7 Twp. 18S Rge. (E)26W(W)
Location as "NE/CNW/SW" or footage from lines SW SE
Lease Owner THUNDERBIRD DRILLING, INC.
Lease Name Teadvine 'A' Well No. 1
Office Address P. O. Box 18507, Wichita, Kansas 67218
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-19-74
Application for plugging filed 12-19-1974
Application for plugging approved 12-19-1974
Plugging commenced 12-19-1974
Plugging completed 12-19-1974
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

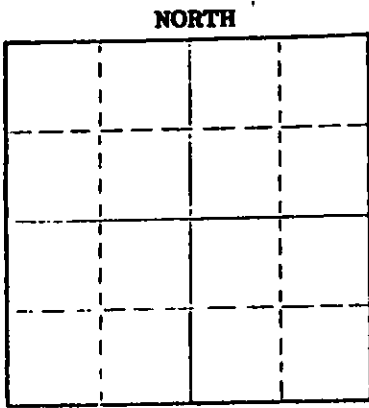

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4590 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	300	8-5/8"	293	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 800', plug, 70 sx cement;
Fluid to 240', plug, 20 sx cement;
Fluid to 40', plug, 10 sx cement;

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.
Address 701 First National Building
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF _____ ss.

JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
710 First Nat'l Bldg., Wichita, Ks.
(Address)

Subscribed and Sworn to before me this 27th day of December, 1974

My commission expires August 25, 1976

Ella Priess
Ella Priess Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

DRILLERS' LOG

THUNDERBIRD DRILLING, INC.
 No. 1 Toadvine 'A'
 SW SE, Sec. 7-18S-26W
 Ness County, Kansas

Elevation: 2623 K.B.

Commenced: 12-11-74
 Completed: 12-19-74

Surface Casing: 293' of
 8-5/8" cemented w/225 sx
 common cement, 2% Gel, 3% cc.
 12-11-74

FORMATIONDEPTH

Surface Hole	0 - 300
Shale	300 - 470
Shale & Sand	470 - 1365
Shale	1365 - 1404
Blaine Anhydrite	1404 - 1415
Shale, Sand & Red Bed	1415 - 1989
Anhydrite	1989 - 2032
Shale	2032 - 2330
Shale & Lime	2330 - 2555
Lime & Shale	2555 - 3870
Lime	3870 - 4560
Lime & Chert	4560 - 4590 T.D.

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
 JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 27th day of December, 1974.

My Commission Expires:
 August 25, 1976

Ella Priess
 Ella Priess, Notary Public

