


15.165-00319-0000  
14

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

### WELL PLUGGING RECORD

Rush County. Sec. 16 Twp. 17 Rge. 16 (E)WestW)  
Location as "NE/CNW/SW" or footage from lines 330' S. & 330' E. of Cen.  
Lease Owner Cities Service Petroleum Company  
Lease Name Brack Well No. 1  
Office Address Box 308, Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 11 1962  
Application for plugging filed August 11 1962  
Application for plugging approved August 12 1962  
Plugging commenced August 12 1962  
Plugging completed August 12 1962  
Reason for abandonment of well or producing formation Dry Hole

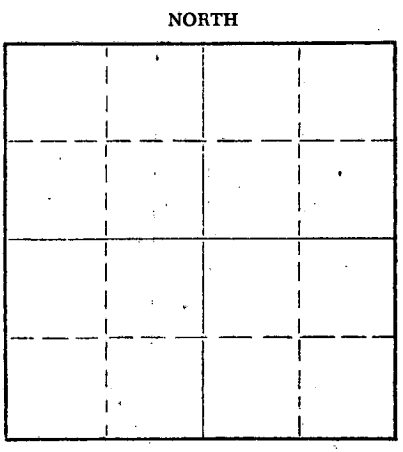

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - 19-  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation None Depth to top - Bottom - Total Depth of Well 3754 Feet  
Show depth and thickness of all water, oil and gas formations.

#### OIL, GAS OR WATER RECORDS

#### CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1172'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from - feet to - feet for each plug set.

3754-500', mud.  
500-180', Howco wood plug, 1/2 sack hulls, 20 sx cement, mud.  
180-40', Howco wood plug, 1/2 sack hulls, 20 sx cement, mud.  
40' to base of cellar, wood plug, 1/2 sack hulls, 10 sx cement.

**RECEIVED**  
STATE CORPORATION COMMISSION  
AUG 21 1962  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Peel Brothers, Inc.  
Address Hoisington, Kansas

STATE OF Kansas COUNTY OF Barton, ss.  
John D. Forsyth (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John D Forsyth  
Box 308, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of August, 1962  
H. E. Smith  
Notary Public.  
My commission expires March 12, 1963.

## WELL RECORD

Company Cities Service Petroleum Company Well No. 1 Farm Brack  
 Location 330' South and 330' East of Center Sec. 16 T. 17 R. 16W  
 Elevation 2033 K.B., 2030 D.F., 2026 Gr. County Rush State Kansas  
 Initial Prod. Dry hole. P. and A. 8-12-62. Contractor Peel Bros., Inc.  
 Acid None Drlg. Comm. July 26, 1962  
 T.D. 3754' Drlg. Comp. August 11, 1962

CASING RECORD:

8-5/8" at 1169' with 550 sacks cement.

FORMATION RECORD:

clay	0-50
shale and shells	100
sand	150
shale, streaks sand	395
shale and shells	475
shale and sand streaks	530
sand	765
shale and sand	870
shale, sand and red bed	1160
Anhydrite	1191
shale	1290
shale and shells	1695
shale and lime	1950
lime	2595
lime and shale	2745
shale	2855
lime	2890
lime and shale	2990
lime	3597
Conglomerate	3617
Conglomerate and lime	3630
lime	3750
sand	3754 T.D.

SLOPE TESTS (SYFO): 1500' - 1/4"  
 2000' - 1/4"  
 2526' - 1/4"

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 AUG 21 1962  
 CONSERVATION DIVISION  
 Wichita, Kansas