


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Rush County, Sec. 18 Twp. 17S Rge. 16 (S) (W)
Location as "NE/CNW/SW" or footage from lines SW SW SE
Lease Owner Frontier Oil
Lease Name Schriner Well No. 2
Office Address 1720 Wichita Plaza
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 2-28 19 75
Application for plugging filed 2-28 19 75
Application for plugging approved _____ 19 _____
Plugging commenced 3-3 19 75
Plugging completed 3-6 19 75
Reason for abandonment of well or producing formation Non-Commercial

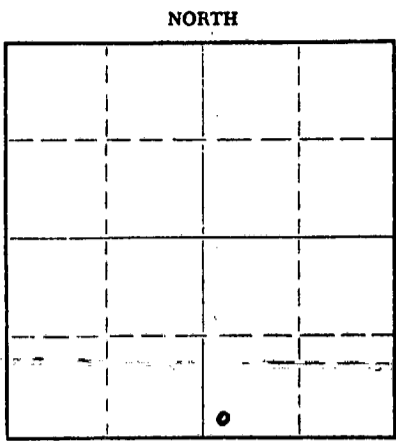

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production None 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Law-KC Depth to top 3310 Bottom 3530 Total Depth of Well 3592 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set wood bridge plug at 3300'. Dumped 30 gal. sand on plug. Mixed 3 sacks of cement and dumped on top of sand. Shot off casing at 2618 and pulled casing.
Pushed 8" wood plug with tools down to 390'. Dumped 10' of rock on top of plug. Dumped 5 1/2 yards cement (6 ss/yard) and filled up to top.

RECEIVED
STATE CORPORATION COMMISSION

MAR 11 1975

03-11-75
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Allied Cement Company
Address Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Maxine V. Starr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr

1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

Subscribed and sworn to before me this 7th day of March, 1975

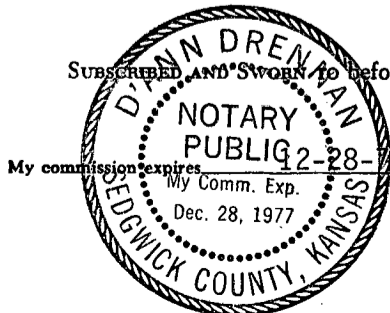

D'Ann Drennan
Notary Public.