

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-191-21133-00-01
Spot: SWNE Sec/Twnshp/Rge: 5-33S-4W
3300 feet from S Section Line, 1980 feet from E Section Line
Lease Name: TRACY OWWO Well #: 1
County: SUMNER Total Vertical Depth: 5656 feet

Operator License No.: 5039
Op Name: AGV CORP.
Address: PO BOX 377
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	3426	1515	150 SX CMT.
SURF	8.625	323		300 SX CMT.

Well Type: GAS UIC Docket No: Date/Time to Plug: 12/07/2010 12:00 AM
Plug Co. License No.: 34227 Plug Co. Name: AMERICAN WELL SERVICE LLC
Proposal Rcvd. from: DAVE MILLER Company: AGV CORP Phone:

Proposed Plugging Method: CIBP 2100 & 2 SKS, REC CASING, 35 SXS 850', 35 SXS 500' CIRC 375-0'.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: NONE
Date/Time Plugging Completed: 12/07/2010 5:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 2120' & CAPPED WITH 2 SKS OF CMT. CASING RECOVERED FROM 1515' & PULLED TO 850' WHERE 35 SXS OF CMT WAS SPOTTED. PULL CASING TO 500' & SPOTTED 35 SXS CMT. PULLED CASING TO 375' & CIRC'D CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3350	3352		

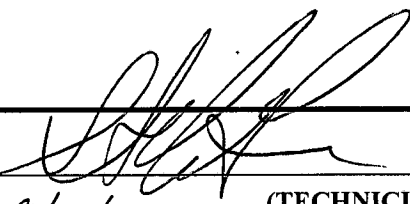
RECEIVED
SEP 11 2012
KCC WICHITA

Remarks: ALLIED CMT. 60/40 4% GEL.

Plugged through: CSG

District: 02

Signed


9/19/12
(TECHNICIAN)