15-135-19112-00-00


Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

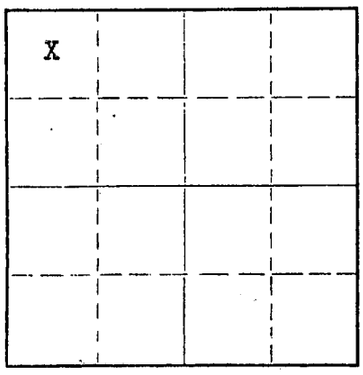

Locate well correctly on above Section Plat

~~XXXXX~~ Ness County. Sec. 22 Twp. 18 Rge. 23 (E) (W)

Location as "NE/CNW¼SW¼" or footage from lines C NW NW

Lease Owner Mull Drilling Co. Inc.

Lease Name Raum Well No. 1

Office Address 1625 Plaza Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 5-18-63 19

Application for plugging filed 5-18-63 19

Application for plugging approved 5-18-63 19

Plugging commenced 5-18-63 19

Plugging completed 5-18-63 19

Reason for abandonment of well or producing formation Non productive.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Petty Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4420' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with pump truck through drill pipe, with bottom plug put at 540' with 20 sacks cement, second plug put at 240' with 20 sacks cement, top plug put at 40' with hulls and 10 sacks cement. This completed plugging.

RECEIVED
STATE CORPORATION COMMISSION
MAY 29 1963
05-29-1963
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Globe cementing co.

Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Joseph O. Butts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joseph O. Butts

Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of May, 1963

Bettie H. Salter
Notary Public.

My commission expires October 16, 1965

15-135-19112-00-00

ROTARY DRILLERS' LOG

COMPANY: MULL DRILLING CO., INC.
WICHITA, KANSAS

CONTRACTOR: MULL DRILLING CO., INC.
WICHITA, KANSAS

CASING RECORD: Set 257' of 8 5/8" csg. w/150 sx.

ROTARY DRILLING COMMENCED: 5-9-63

ROTARY DRILLING COMPLETED: 5-19-63

LOCATION: #1 RAUM
C NW NW 22-18S-23W
Ness County, Kansas

(Figures indicate bottom of formation - measurements from top of rotary bushing.)

257'	Blue Shale & Clay
1420'	Sand w/Shale
1578'	Shale, etc.
1620'	Anhydrite
1850'	Shale, etc.
2215'	Sandy Shale
3173'	Shale & Lime
3314'	Cherty Lime & Shale
3480'	Sandy Lime & Shale
3975'	Lime w/Shale
4046'	Lime
4180'	Lime & Shale
4215'	Lime
4286'	Lime w/Shale
4350'	Cherty Lime & Shale
4378'	Cherokee Sand
4410'	Cherokee
4426'	Mississippi & Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAY 29 1963
05-29-1963
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

MULL DRILLING COMPANY, INC.

Joseph B. Brungardt, Jr.
JOSEPH B. BRUNGARDT, JR.

STATE OF KANSAS:)
COUNTY) SS
OF SEDGWICK.)

Subscribed and sworn before me this 24th day of May, 1963.

Lola L. Foster
Lola L. Foster, Notary Public

My commission expires April 17, 1966.

LOLA L. FOSTER NOTARY PUBLIC SEDGWICK CO., KANS.