


15-135-21086-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD



Locate well correctly on above  
Section Plat

Ness County, Sec. 33, Twp. 17S Rge. (E) 26 (W)  
Location as "NE/CNWxSWx" or footage from lines C/NE NW/4  
Lease Owner: Strata Drilling Company  
Lease Name: Davis Well No. 1  
Office Address: P. O. Box 355, Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed September 3 19 75  
Application for plugging filed September 3 19 75  
Application for plugging approved September 3 19 75  
Plugging commenced September 3 19 75  
Plugging completed ~~September 4~~ <sup>ANOKA</sup> October September 4 19 75  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays  
Producing formation Depth to top Bottom Total Depth of Well 4525 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	298.23'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole plugged as follows: Plugged at 720' with 70 sacks of 50-50 pozmix and 6% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 6% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 6% gel, 2 sacks of 50-50 pozmix in the rathole and 2 sacks of 50-50 pozmix in the mousehole. Plug down at 1:15 A. M. October 4, 1975.

RECEIVED  
STATE CORPORATION COMMISSION

OCT 7 1975

CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor: Strata Drilling Company  
Address: P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.  
Kenneth J. Link (employee or owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Kenneth J. Link  
Kenneth J. Link, President  
P. O. Box 355, Great Bend, Kansas 67530  
(Address)

Subscribed and Sworn to before me this 6th day of October, 1975

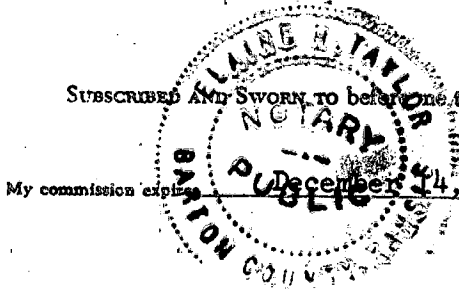

Elaine H. Taylor  
Notary Public

15-135-21086-0000

DRILLERS LOG

#1 Davis

CASING RECORD:  
292.73' of new 8-5/8" surface casing.

COMPANY: Strata Drilling Company  
CONTRACTOR: Strata Drilling Company

DESCRIPTION: C/NE NW/4  
Section 33-17S-26W  
Ness County, Kansas

TOTAL DEPTH:  
4525'

COMMENCED: September 24, 1975  
COMPLETED: October 4, 1975

ELEVATION: 2538' RB

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Post Rock, Shale & Hard Sand	0	310	Ran 292.73' of new 8-5/8" surface casing; set and cemented at 298.23' with 180 sacks of common cement, 2% gel and 3% C. C. Plug down at 10:30 P. M. September 24, 1975.
Shale	310	1180	
Shale & Sand	1180	1795	
Shale	1795	2045	
Shale & Lime	2045	4230	
Lime	4230	4320	
Lime & Shale	4320	4485	
Lime	4485	4525	

ROTARY TOTAL DEPTH: 4525'

Ran Drill Stem Tests.

Ran Electric Log.

D. & A.

Hole plugged as follows: plugged at 720' with 70 sacks of 50-50 pozmix and 6% gel; plugged at 240' with 20 sacks of 50-50 pozmix and 6% gel; plugged at 40' with 10 sacks of 50-50 pozmix and 6% gel, 2 sacks of 50-50 pozmix in the rathole and 2 sacks of 50-50 pozmix in the mouse-hole. Plug down at 1:15 A. M. October 4, 1975.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 7 1975  
CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS )  
                          ) ss.  
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING COMPANY

*Kenneth J. Link*  
Kenneth J. Link, President

Subscribed and sworn to before me this 6th day of October, 1975.

My Commission Expires:  
December 14 1977

*Elaine H. Taylor*  
Elaine H. Taylor, Notary Public

