


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

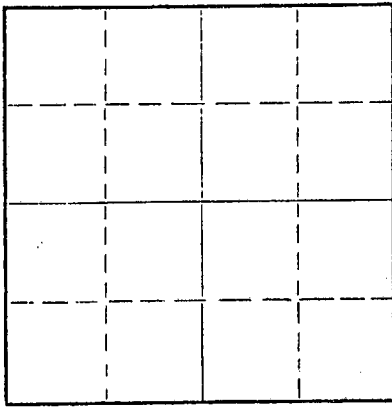

Locate well correctly on above
Section Plat

Ness County, Sec. 36 Twp. 17S Rge. (E) 26 (W)

Location as "NE/CNW/SW" or footage from lines C/NE NE

Lease Owner California Time Petroleum, Inc.

Lease Name Norton Well No. 1

Office Address Suite 515 Union Nat. Bank Bldg., 9460 Wilshire Blvd.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Beverly Hills, Calif.

Date well completed August 6 19 69

Application for plugging filed August 6 19 69

Application for plugging approved August 6 19 69

Plugging commenced August 6 19 69

Plugging completed August 6 19 69

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4420 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0'	287.47'			

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 1969
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole as follows: Plugged at 720' with 70 sacks of cement; plugged at 270' with 20 sacks of cement; plugged at 40' with 10 sacks of cement. Plug down at 2:00 P. M. August 6, 1969.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Strata Drilling, Inc.

Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss. Jim B. McWilliams (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim B. McWilliams
Jim B. McWilliams
P. O. Box 355, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN to before me this 7th day of August, 1969

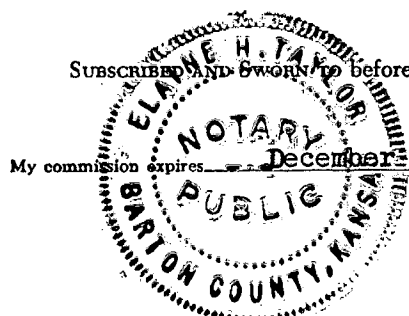

Elaine H. Taylor
Notary Public.

15-135-20270-0000

D R I L L E R S L O G

#1 Norton

CASING RECORD:
287.47' of new 8-5/8"
surface casing.

COMPANY: California Time Petroleum, Inc.
CONTRACTOR: Strata Drilling, Inc.

DESCRIPTION: C/NE NE
Section 36-T17S-R26W
Ness County, Kansas

TOTAL DEPTH:
4420'

COMMENCED: July 29, 1969
COMPLETED: August 6, 1969

ELEVATION: 2432' GR

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Clay & Post Rock	0	308	Ran 287.47' of new 8-5/8" surface casing; set and cemented at 287.47' with 160 sacks of common cement, 2% gel and 3% C. C. Plug down at 6:20 A. M. July 30, 1969.
Shale & Shells	308	435	
Shells, Red Bed, Shale & Sand	435	1158	
#1 Anhydrite	1158	1168	
Red Bed and Shale	1168	1225	
Shale	1225	1250	
Sand	1250	1500	
Shale & Lime	1500	4105	
Lime	4105	4420	

Total Depth 4420'

RECEIVED
STATE CORPORATION COMMISSION
AUG 8 1969
CONSERVATION DIVISION
Wichita, Kansas

D. & A.

Plugged hole as follows: Plugged at 720' with 70 sacks of cement; plugged at 270' with 20 sacks of cement; plugged at 40' with 10 sacks of cement. Plug down at 2:00 P. M. August 6, 1969.

STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

Jim B. McWilliams
Jim B. McWilliams, Secy-Treas.

Subscribed and sworn to before me this 7th day of August, 1969.

Elaine H. Taylor
Elaine H. Taylor, Notary Public

