


15-135-20924-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Ness County, Sec 4 Twp 18S Rge (E) 24W

Location as "NE/CNW/SE" or footage from lines C NW NE
Lease Owner PETROLEUM, INC.
Lease Name Elting 'B' Well No. 1
Office Address 800 R.H. Garvey Bldg., Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10-31 19 74
Application for plugging filed 10-31 19 74
Application for plugging approved 10-31 19 74
Plugging commenced 10-31 19 74
Plugging completed 10-31 19 74
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

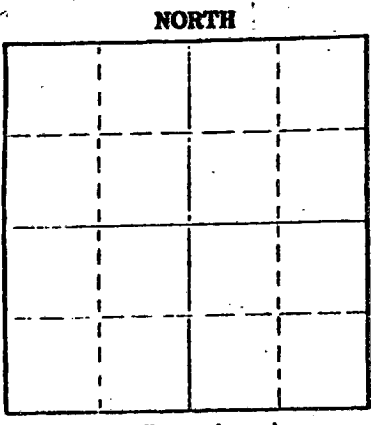

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4380 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	288	8-5/8"	280	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 600', plug, 70 sx cement;
Fluid to 240', plug, 20 sx cement;
Fluid to 40, 1/2 sx hulls, 10 sx cement.

RECEIVED
STATE CORPORATION COMMISSION
NOV 12 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) D N B DRILLING, INC.
Address (D) (F) 701 First Nat'l Bldg., Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF _____ ss.
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
701 First Nat'l Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of November 19 74

Ella Priess
Notary Public

My commission expires August 25, 1976

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-135-20924-0000

DRILLERS' LOG

PETROLEUM, INC.
No. 1 Elting 'B'
C NW NE, Sec. 4-18S-24W
Ness County, Kansas

Elev: 2319 K.B.

Commenced: 10-24-74
Completed: 10-31-73

Surface Casing: 280' of
8-5/8" cemented w/200 sx
common cement, 2% Gel, 3%
cc. 10-24-74

FORMATION

DEPTH

Surface Hole	0 - 288
Shale & Sand	288 - 950
Shale	950 - 969
Blaine Anhydrite	969 - 981
Shale & Red Bed	981 - 1085
Sand	1085 - 1240
Shale	1240 - 1602
Anhydrite	1602 - 1642
Shale	1642 - 2040
Shale & Lime	2040 - 2735
Lime & Shale	2735 - 3730
Lime	3730 - 4380 T.D.

RECEIVED
STATE CORPORATION COMMISSION

NOV 12 1974

CONSERVATION DIVISION
Wichita, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state the 11th day of November, 1974.

My Commission Expires:
August 25, 1976

Ella Priess
Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976