

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-30269-00-00 *CANNOT INV. - PLUG*
Spot: SENENE Sec/Twnshp/Rge: 22-30S-7W *DT. EXCEEDS*
4290 feet from S Section Line, 330 feet from E Section Line *5' R.*
Lease Name: CRUMLEY Well #: 1-4 D *CUT OFF*
County: KINGMAN Total Vertical Depth: 4245 feet

Operator License No.: 3959
Op Name: SIROKY OIL MANAGEMENT
Address: PO BOX 464
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4242	2500	100 SX CMT
SURF	8.625	241		200 SX CMT

KW
n

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/22/2004 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: (620) 672-5713

Proposed Plugging Method: SAND TO 4120' & 5 SKS CMT. REC PIPE 1300' 35 SKS, 600' 35 SXS. 310' CIRC CEMENT.

Plugging Proposal Received By: _____ Witness Type: NONE
Date/Time Plugging Completed: 11/22/2004 2:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

SANDED PERFS TO 4105' & CAPPED WITH 5 SXS CEMENT. REC'D 2500' OF CASING.
PULLED CASING TO 1300' SPOTTED 35 SXS CEMENT. PULLED CASING TO 600',
SPOTTED 35 SX CEMENT. PULLED CASING TO 310' & CIRC'D CEMENT TO
SURFACE WITH 130 SKS CEMENT.

Perfs:

Top	Bot	Thru	Comments
4176	4186		CSG


RECEIVED
SEP 18 2012
KCC WICHITA

Remarks: ALLIED CEMENT 60/40 4% GEL.

Plugged through: CSG

District: 02

Signed _____

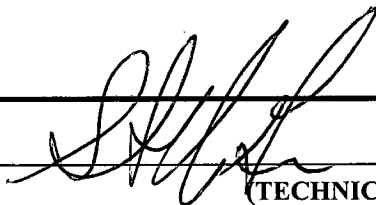

(TECHNICIAN)

JK