

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Rush County, Sec. 27 Twp. 16 Rge. (E) 20 (W)

Location as "NE/CNW/SW" or footage from lines SE SW SW

Lease Owner Raymond Oil Company, Inc.

Lease Name Stephens "A" Well No. 1

Office Address 410 Fourth National Bank Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 6, 1968 19

Application for plugging filed January 9, 1968 19

Application for plugging approved January 8, 1968 19


Plugging commenced January 6, 1968 19

Plugging completed January 6, 1968 19

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

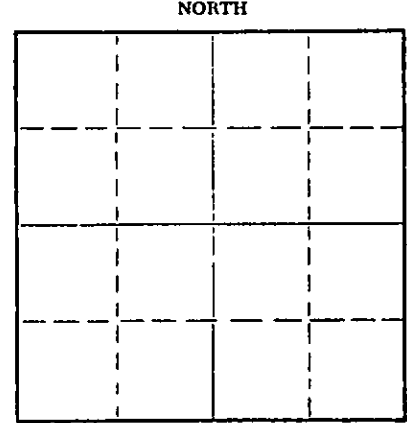

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	225'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set plug at 510' w/100 sx.
Set plug at 210' w/25 sx.
Set plug at 40' w/10 sx
Two sacks in rat hole

RECEIVED
STATE CORPORATION COMMISSION
JAN 10 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Raymond Oil Company, Inc.

Address 410 Fourth National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


Wm. M. Raymond (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wm M Raymond
410 Fourth National Bank Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of January 19 68

My commission expires February 15, 1971

Ronnie Donnelly Notary Public



RAYMOND OIL COMPANY, INC.
 #1 STEPHENS "A"
 SE SW SW Sec. 27-16S-20W
 Rush County, Kansas

ELEVATION: 2124 KB
 2122 DF
 2119 GL

Drilling Contractor: Company Tools
 Date Commenced: December 28, 1967
 Date Completed: January 6, 1968

Casing Record
 Set 226' 8-5/8" w/175 sx.

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Shale	780
Sand	1045
Shale, Shell w/Red Bed	1238
Shale & Red Bed	1368
Anhydrite	1403
Shale & Red Bed	1730
Shale	2030
Shale & Shells	2125
Shale & Lime	2302
Lime & Shale	2760
Shale & Lime	2965
Lime & Shale	3615
Lime	3876
Lime & Chert	3885
Cherokee Shale	3903
Lime & Chert	3906
Conglomerate	3914
Arbuckle	3928
RTD	3928

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 10 1968
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I hereby certify that the above and foregoing is true and correct to the best of my knowledge.

 Wm. M. Raymond

Subscribed to and sworn to before me, this 9th day of January 1968.

Ronnie Donnelly

 Ronnie Donnelly - Notary Public

My commission expires:

February 15, 1971

