

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202

Form CP-4  
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Rush SEC. 12 TWP. 16 RGE. 20 E/W  
Location as in quarters or footage from lines:  
SE NW NE


Lease Owner Ram Petroleum Corporation  
Lease Name Watson B Well No. 1  
Office Address 800 Vickers, KSB&T Building, Wichita, KS 67202  
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole  
Date Well Completed July 9, 1981  
Application for plugging filed Verbal application  
Plugging commenced July 9, 1981  
Plugging completed July 9, 1981  
Reason for abandonment of well or producing formation \_\_\_\_\_

Locate Well  
correctly on above  
Section Platt.

Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom \_\_\_\_\_ T.D. 3796'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8-5/8	1300'	

Describe in detail the manner in which the well was plugged, indicating where the mud  
fluid was placed and the method or methods used in introducing it into the hold. If cement  
or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet  
to \_\_\_\_\_ feet for each plug set.

65 sxs 1320'  
30 sxs 270'  
10 sxs 40' with solid wood bridge 1/2  
5 sxs Rathole

REC'D  
STATE COMMISSION  
7-17-81

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sun Cementing

STATE OF Kansas COUNTY OF Sedgwick, ss.


Gary Younger, Agent (~~employee~~ or owner) of the  
above-described well, being first duly sworn on oath, says: That I have knowledge of the  
facts, statements, and matters herein contained and the log of the above-described well as  
filed and that the same are true and correct. So help me God.

(Signature) Gary Younger  
251 N. Water, #10, Wichita, Ks.  
(Address) 67202

SUBSCRIBED AND SWORN TO before me this 14th day of July, 19 81

Helen Pracht  
Helen Pracht - Notary Public.

My Commission expires: June 4, 1985

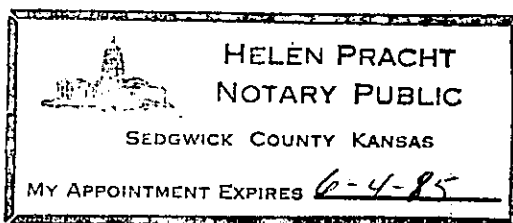

KANSAS DRILLERS LOG

COMPANY Ram Petroleum Corporation  
FARM Watson B NO. 1

SEC. 12 T. 16 R. 20W  
LOC. SE NW NE

ROTARY TOTAL DEPTH 3796'  
COMM. June 29, 1981 COMP. July 9, 1981  
CONTRACTOR H-30, INC. Rig No.11)  
ISSUED July 14, 1981

COUNTY Rush

CASING

10 3/4"  
8 5/8" - set at 1300' - cemented w/500 sxs cement  
5 1/2"  
4 1/2"

ELEVATION 2099 G.L.

FIGURES INDICATE BOTTOM OF FORMATIONS

Clay	40'
Shale	1304'
Red Bed	1318'
Anhydrite	1353'
Shale	2225'
Lime and Shale	2420'
Shale and Lime	2616'
Broken Lime	2715'
Lime and Shale	3150'
Broken Lime	3265'
Lime	3796
RTD	3796

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.


*Gary Younger*  
Gary Younger

State of Kansas )  
County of Sedgwick ) ss

Subscribed and Sworn to before me, a Notary Public, in and for said county and state this 14th day of July, 1981.

*Helen Pracht*  
Helen Pracht - Notary Public

My Commission Expires:  
June 4, 1985

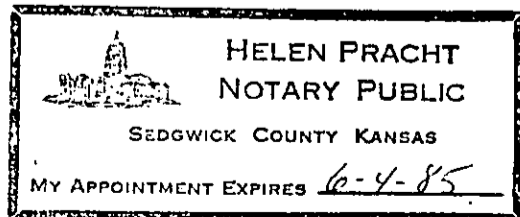

STATE CO  
111  
111