


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

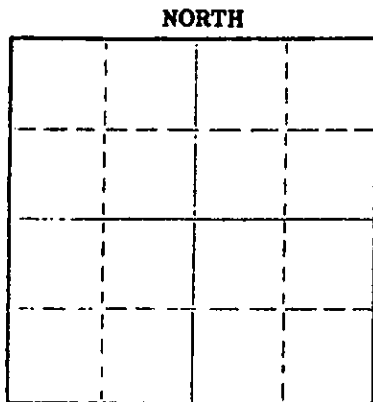

Locate well correctly on above Section Plot

Rush County. Sec. 9 Twp. 16S Rge. 20W (E) (W)
Location as "NE/CNW/SW" or footage from lines: NE NW NE
Lease Owner: L & L Oil Company
Lease Name: Foster Well No. 1
Office Address: 720 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole): D & A
Date well completed: December 18 19 74
Application for plugging filed: December 18 19 74
Application for plugging approved: December 18 19 74
Plugging commenced: December 18 19 74
Plugging completed: December 18 19 74
Reason for abandonment of well or producing formation: D & A

If a producing well is abandoned, date of last production: 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well: Leo Massey
Producing formation: Depth to top: Bottom: Total Depth of Well: 3975
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	204'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged w/75 sx @ 800',
15 sx @ 225' & 40' w/10 sx.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor: B & B Drilling, Inc.
Address: 720 Union Center, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.
Bill Lahar (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill Lahar
720 Union Center, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 23rd day of December 1974

My commission expires January 29, 1977
Betty M. Maloney Notary Public

RECEIVED
STATE CORPORATION COMMISSION

DEC 24 1974

CONSERVATION DIVISION
WICHITA, KANSAS

15.165-20508-0000

December 23, 1974

DRILLERS LOG

#1 Foster
NE NW NE
Sec. 9-16S-20W
Rush County, Kansas

OPERATOR: L & L Oil Company
CONTRACTOR: B & B Drilling, Inc.
COMMENCED: December 10, 1974
COMPLETED: December 18, 1974

8 5/8" @ 204' w/140 sx

0	210	Surface Clay, Shells & Shale
210	1160	Shale & Sand
1160	1425	Shale & Shells
1425	1480	Anhydrite
1480	1730	Shale & Sand
1730	2180	Shale
2180	2400	Lime & Shale
2400	2510	Shale
2510	2840	Shale & Lime
2840	3010	Shale
3010	3370	Lime & Shale
3370	3485	Lime
3485	3695	Lime & Shale
3695	3805	Lime
3805	3910	Lime & Chert
3910	3975	Lime & Shale
3975		RTD

RECEIVED
STATE OF KANSAS DEPARTMENT OF REVENUE

DEC 24 1974

D & A

We certify that the above and foregoing is a true and correct copy of the log on the #1 Foster located in Rush County, Kansas.

B & B DRILLING, INC.

Bill Lahar
Bill Lahar

Subscribed and sworn to before me this 23rd day of December, 1974.

Betty M. Maloney
Betty M. Maloney Notary Public

My Commission Expires:
January 29, 1977