


15-135-30140-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ness County. Sec. 12 Twp. 20S Rge. 23 (E) (W)X
Location as "NE/CNW&SW4" or footage from lines _____
Lease Owner Shell Oil Company
Lease Name Westermeyer Well No. 1-12
Office Address 1200 First National Building Oklahoma City, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved 6-13-66 19____
Plugging commenced 7-18-66 19____
Plugging completed 7-27-66 19____
Reason for abandonment of well or producing formation _____

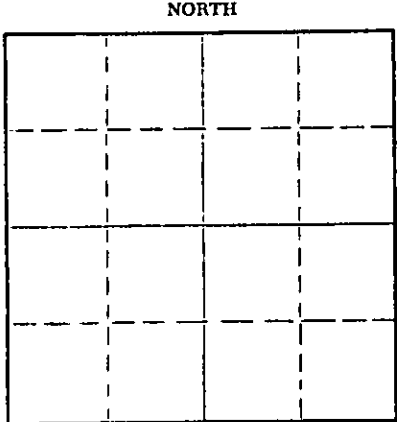

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1370 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	247	None
				4 1/2	None	2729

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in. Rigged up. Cleaned out cellar. Cleared hole to sand back - bottom at 4318'.
Sanded back from 4318' to 4170'. Mixed and dumped 4 sacks of cement on sand bridge at 4170'. Rigged up jacks - had 11 1/2" tension at 85,000 lbs. Worked casing to 20" tension. Shot pipe at 3491'.
Working pipe. Cleared hole for shot. Shot pipe at 3001'. Working pipe. Shot pipe at 2718'. Pulling pipe.
Finished pulling pipe. Tallied.
Dug out cellar deeper to cut off surface. Broke off braden head. Assembled braden head and tubing head and took same to doghouse.
Squeezed well with 25 sacks of gel and 85 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Casing Pulling, Inc. **AUG 4 1966**
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss. Wichita, Kansas
J. O. Forbes (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2 day of August, 1966

My commission expires May 27, 1969
[Signature] Notary Public.

15-135-30140-0000

DRILLER'S LOG


COMPANY: Shell Oil Company
 CONTRACTOR: Leben Drilling, Inc.
 FARM: WESTERMEYER #1-12
 LOCATION: C SE SE Sec. 12-20S-23W
 NESS COUNTY, KANSAS
 COMMENCED: 9-23-65
 COMPLETED: 10-4-65

0	30	Surface clay, rock
30	350	Shale, rock
350	903	Shale
903	1090	Sand
1090	1400	Sand, Shale
1400	1443	Shale
1443	1455	Anhydrite
1455	2170	Shale, shells
2170	2570	Shale, lime
2570	2655	Lime, shale
2655	2940	Shale, lime
2940	2970	Lime, shale
2970	3350	Shale, lime
3350	3890	Lime, shale
3890	4368	Lime
	<u>4368</u>	<u>RTD - Set 4 1/2" Casing</u>

RECEIVED
 STATE COMMISSIONER OF GEOL. & MINES
 JUN 13 1966

Set 8 5/8" used surface casing @ 260' with 200 sacks 60-40 Posmix
Sunset 2% Gel


I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Westermeyer #1-12 well, located C SE SE of Section 12, Township 20 South, Range 23 East, Ness County, Kansas, as reflected by the records of Leben Drilling, Inc.



 Leslie Kite

STATE OF KANSAS }
 COUNTY OF BARTON } SS

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 6th day of September, 1965.



 Ulanda Nichols

My Commission Expires:
April 1, 1967