

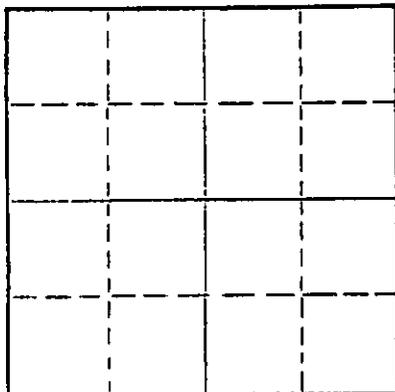
15-135-21187-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD



Locate well correctly on above  
Section Flat

Ness County, Sec. 19 Twp. 20S Rge. 23W (E) (W)  
Location as "NE/CNW/SE/SW" or footage from lines SE NE  
Lease Owner Chief Drilling Co., Inc.  
Lease Name Strobel Well No. #1  
Office Address 905 Century Plaza, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 4/18/76 19  
Application for plugging filed 4/19/76 19  
Application for plugging approved 4/19/76 19  
Plugging commenced 4/18/76 19  
Plugging completed 4/18/76 19  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 4480' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	290'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

50 sacks @ 500'  
25 sacks @ 240'  
10 sacks @ 40'

4-21-76

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Chief Drilling Co., Inc.  
Address 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK ss.  
Jim Robinson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jim Robinson  
905 Century Plaza, Wichita, Ka. 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of April, 1976

My commission expires  
MARILYN SINARD  
STATE NOTARY PUBLIC  
SEDGWICK COUNTY, KANSAS  
MY COMM. EXP. APR. 30, 1979

Marilyn Sinard  
Marilyn Sinard - Notary Public.

15-135-21187-0000

WELL LOG

CHIEF DRILLING CO., INC.  
905 Century Plaza  
Wichita, Kansas 67202

#1 STROBEL  
SE NE Sec. 19-20S-23W  
Ness County, Kansas

CONTRACTOR: Company Tools  
CASING RECORD: 8 5/8" set @ 290', cemented  
w/200 sacks Common, 3% c.c.,  
2% gel

COMMENCED: 4/10/76  
COMPLETED: 4/18/76

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Surface hole	0	293
Sand & Shale	293	2550
Sand & Shale & Lime	2550	2640
Shale & Lime	2640	3355
Lime	3355	3590
Shale & Sand	3590	3880
Lime	3880	4480
Total Depth	4480	


<u>ELEVATIONS</u>
2293 Gr.
2295 D.F.
2298 K.B.

<u>FORMATION TOPS</u>	
Anhydrite	1538 + 760
Base Anhydrite	1576 + 722
Heebner	3740 - 1442
Lansing	3790 - 1492
Pawnee	4228 - 1930
Ft. Scott	4299 - 2001
Cong.	4366 - 2068
Cong. Sand	4382 - 2084
Mississippi	4414 - 2116
Miss. Dolo.	4418 - 2120
LTD	4480 - 2182

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:


I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the SE NE of Section 19-20S-23W Ness County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

  
Jim Robinson, Vice-President

Subscribed and sworn to before me this 20th day of April, 1976.

MARILYN SINARD  
STATE NOTARY PUBLIC  
SEDGWICK COUNTY, KANSAS  
MY COMM. EXP. APR. 30, 1979

  
Marilyn Sinard - Notary Public