

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-063-22027-00-00  
Spot: SENENENW Sec/Twnshp/Rge: 28-13S-30W  
480 feet from N Section Line, 2580 feet from W Section Line  
Lease Name: BROOKOVER Well #: 28-2  
County: GOVE Total Vertical Depth: 4625 feet

Operator License No.: 6627  
Op Name: PROSPECT OIL & GAS CORP  
Address: PO BOX 837  
RUSSELL, KS 67665

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	212		150 sx

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/26/2012 12:00 AM  
Plug Co. License No.: 33905 Plug Co. Name: ROYAL DRILLING INC  
Proposal Rcvd. from: DOUG Company: ROYAL DRILLING INC Phone: (785) 735-4142

Proposed Plugging Method: Ordered 245 sx 60/40 pozmix - 4% gel cement with 1/4# flo-seal per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE  
Date/Time Plugging Completed: 08/26/2012 6:00 AM KCC Agent: DAVID WANN

Actual Plugging Report:

1st plug @2330 w/25 sx  
2nd plug @1400 w/100 sx  
3rd plug @260 w/40 sx  
4th plug @40 w/10 sx  
  
Rathole 30 sx Mousehole 15 sx

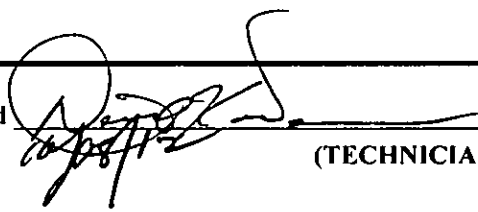
Perfs:

RECEIVED  
SEP 17 2012  
KCC WICHITA

Remarks: QUALITY

Plugged through: DP

District: 04

Signed  (TECHNICIAN) CM

SEP 12 2012