

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-137-20616-00-00
Spot: SESENWSW Sec/Twnshp/Rge: 17-3S-22W
1330 feet from S Section Line, 1030 feet from W Section Line
Lease Name: ESSLINGER RANCH Well #: 1-17
County: NORTON Total Vertical Depth: 3882 feet

Operator License No.: 32819
Op Name: BAIRD OIL COMPANY LLC
Address: 113 W MAIN PO BOX 428
LOGAN, KS 67646

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	301		185 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 09/24/2012 12:00 AM
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC
Proposal Rcvd. from: MARK Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: Ordered 230 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: MARVIN MILLS WitnessType: NONE
Date/Time Plugging Completed: 09/24/2012 6:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

1st plug @3808 w/25 sx
2nd plug @2055 w/25 sx
3rd plug @1288 w/100 sx
4th plug @350 w/40 sx
5th plug @40 w/10 sx

Rathole 30 sx

Perfs:

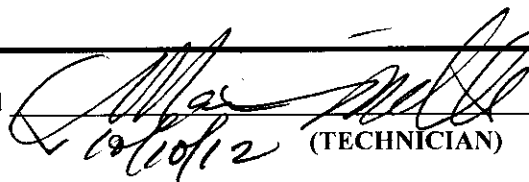
RECEIVED
KANSAS CORPORATION COMMISSION
OCT 09 2012
CONSERVATION DIVISION
WICHITA, KS

Remarks: SWIFT

Plugged through: DP

District: 04

Signed


(TECHNICIAN)

CM

SEP 25 2012