

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-077-21135-00-00
Spot: NWSESESW Sec/Twnshp/Rge: 16-31S-8W
500 feet from S Section Line, 3140 feet from E Section Line
Lease Name: CRITSER Well #: 1C-16
County: HARPER Total Vertical Depth: 4406 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 8080 E CENTRAL STE 300
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4394	2620	125 SX
SURF	8.625	208		135 SX

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 09/04/2012 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: _____

Proposed Plugging Method: SAND TO 4350' & 5 SKS, RECOVERED PIPE, 35 SX 1350', 35 SX 900', CIRCULATED CEMENT 260'-0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 09/04/2012 6:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 4350' & CAPPED WITH 5 SKS CEMENT. THE CASING WAS RECOVERED FROM 2620' & PULLED TO 1350' WHERE 35 SX OF CEMENT WAS SPOTTED. PULLED CASING TO 900' WHERE 35 SX OF CEMENT WAS SPOTTED. PULLED CASING TO 260' & CIRCULATED CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4390	4406	CSG	

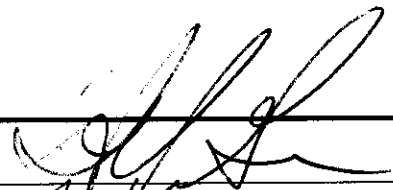
KANSAS CORP
OCT 01 2012
CONSERVATION DIVISION

Remarks: QUALITY WELL SERVICE, INC. 60/40 4% GEL

Plugged through: CSG

District: 02

Signed _____


10/18/12 (TECHNICIAN)