

15-203-20038-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Wichita County. Sec. 30 Twp. 18SRge. 37W E/W
Location as "NE/CNW/SW" or footage from lines
NW SE

Lease Owner WICHITA INDUSTRIES, INC.
Lease Name Perry Well No. 1
Office Address 1700 Broadway, Denver, Colo 80290
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

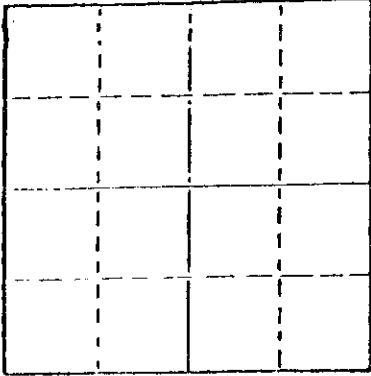

Locate well correctly on above
Section Plot

Date Well completed 5-5 1977
Application for plugging filed 5-5 1977
Application for plugging approved 5-5 1977
Plugging commenced 5-5 1977
Plugging completed 5-5 1977

Reason for abandonment of well or producing formation
No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3030
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Shale	Surface	332	8-5/8"	325	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Fluid to 950', plug, 70 sx cement;
Fluid to 300', plug, 20 sx cement;
Fluid to 40', plug, 10 sx cement.

RECEIVED
STATE CORPORATION COMMISSION
MAY 12 1977
5-12-77
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.
515 R. H. Garvey Building
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF _____, ss.
JAMES L. DONELSON (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.


(Signature) James L. Donelson
515 R. H. Garvey Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of May, 19 77

Ella Priess
Notary Public.

My commission expires 8-25-80

Ella Priess



DRILLERS' LOG

Wichita Industries, Inc.
No. 1 Perry
NW SE, Sec. 30-18S-37W
Wichita, County, Kansas

Elev: 3361 K.B.

Commenced: 4-30-77
Completed: 5- 5-77

Surface Casing: 325' of 8-5/8"
cemented w/ 275 sx Class H
cement, 3% cc. 5-1-77

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 332
Sand & Shale	332 - 1370
Shale, sand & salt stringers	1370 - 2035
Lime, shale streaks and sand	2035 - 2425
Lime & Shale	2425 - 3050 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

James L. Donelson
MAY 10 1977
D N B DRILLING, INC.
WICHITA, KANSAS

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 10th day of May, 1977.

Ella Priess
Ella Priess, Notary Public

