

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-20775-00-01
Spot: SENWSW Sec/Twnshp/Rge: 33-33S-42W
1650 feet from S Section Line, 4290 feet from E Section Line
Lease/Unit Name: MCCLAIN A Well Number: 1
County: MORTON Total Vertical Depth: 5000 feet

Operator License No.: 3716
Op Name: B & G PRODUCTION, INC.
Address: PO BOX 427
BOOKER, TX 79005

Production Casing Size: 4.5 feet: 4855 WITH 400 SX CMT
Surface Casing Size: 8.625 feet: 1643

\$ 162.50

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/09/2003 9:30 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 300# HULLS WITH 20 SX CMT. PLUG AT 1660' WITH 50 SX CMT. PLUG AT 800' WITH 30 SX CMT. PLUG AT 40-0' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 06/11/2003 12:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PERFS AT 4322' & 4666-74'. RUN IN HOLE WITH TUBING TO 4300'. PUMP 300# HULLS WITH 20 SX CMT. CIRCULATE HOLE WITH MUD. 1ST PLUG RUN IN HOLE WITH TUBING TO 1650'. LOAD HOLE & PUMP 50 SX CMT. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE WITH TUBING TO 800'. LOAD HOLE & PUMP 30 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE & PUMP 10 SX CMT TO SURFACE.

RECEIVED
JUN 23 2003
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 2387' OF 4 1/2" CASING.

Plugged through: TBG

District: 01

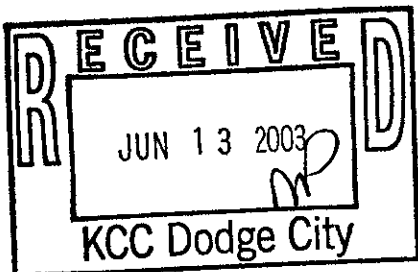

Signed

Jim Holland PRT II
(TECHNICIAN)

INVOICED
DATE 6-24-03
TEL. NO. 200 306 1674

FORM CP 203