

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-203-20185-00-00
Spot: NESWNENW Sec/Twnshp/Rge: 22-18S-38W
955 feet from N Section Line, 1845 feet from W Section Line
Lease Name: OLDHAM Well #: 1
County: WICHITA Total Vertical Depth: 5196 feet

Operator License No.: 33856
Op Name: WHITE EXPLORATION, INC.
Address: 2400 N WOODLAWN STE 115
WICHITA, KS 67220

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	356		WITH 240 SX CMT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 09/17/2012 1:30 PM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: BERNIE MEYER Company: MURFIN DRILLING CO., INC. Phone: (316)267-3241

Proposed Plugging Method: IST PLUG AT 2490' WITH 50 SX CMT. 2ND PLUG AT 1530' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 390' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Plugging Proposal Received By: KENNY SULLIVAN Witness Type: NONE
Date/Time Plugging Completed: 09/17/2012 3:30 PM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

1ST PLUG AT 2490' WITH 50 SX CMT. 2ND PLUG AT 1530' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 390' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

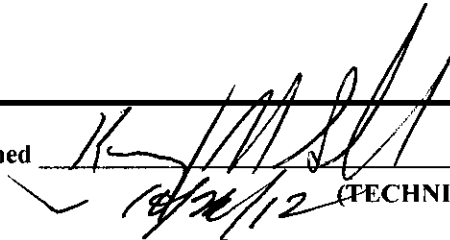
Perfs:

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY CONSOLIDATED.

Plugged through: DP

District: 01

Signed


(TECHNICIAN)

RECEIVED
OCT 09 2012
KCC WICHITA

Handwritten initials