


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
245 North Water
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

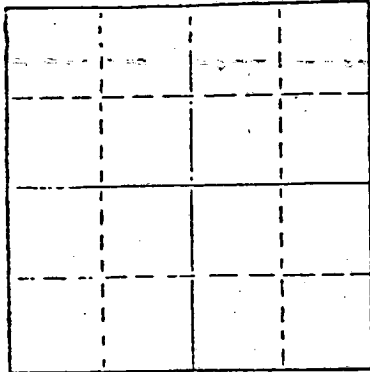

Locate well correctly on above
Section Plat

Ness County, Sec. 25 Twp. 20S Rge. 24 X0E1 (W)
Location as "NE/CNWKSW" or footage from lines 660' FNL & 660' FWL
Lease Owner: Conoco Inc.
Lease Name: Cranston Well No. 1
Office Address: 3817 NW Expressway, Oklahoma City, OK 73112
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed N/A 1984
Application for plugging filed 1-12 1984
Application for plugging approved 1-23 1984
Plugging commenced 2-23 1984
Plugging completed 2-23 1984
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production 1-31 1984
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Richard Lacy
Producing formation Mississippi Depth to top 4349' Bottom 4356' Total Depth of Well 4356'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Dolomite	4356'	4349'	4 1/2"	4349'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1st plug 4349'-4356' - 3 sacks hulls, 25 sacks cement, 10 sacks gel, 25 sacks cement, 5 sacks gel and 100 sacks cement.

2nd plug, 25 sacks cement down the annulus.

Cut casing off 3 feet below the ground and welded on steel plate.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Cementing
Address 702 East 2nd, Eureka, KS 67045

STATE OF OKLAHOMA COUNTY OF OKLAHOMA ss.
Dillon Anders (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) Dillon Anders
3817 NW Expressway, Okla. City, OK 73112
(Address)

8 day of March 1984

Martha K. Benson
Notary Public.



RECEIVED
STATE CORPORATION COMMISSION

MAR 12 1984

CONSERVATION DIVISION
Wichita, Kansas