


K-135-21101-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

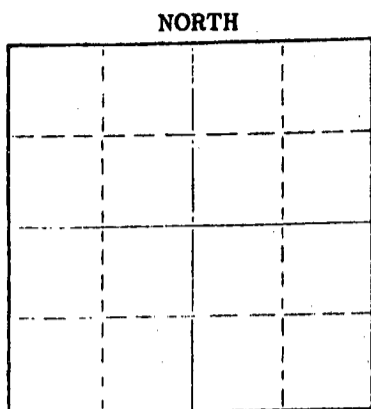

Locate well correctly on above Section Plat

Ness County. Sec. 5 Twp 20S Rge. (E) 24W(W)
Location as "NE/CNW&SW" or footage from lines C NW SE
Lease Owner SIDWELL OIL & GAS CO.
Lease Name Slagle Well No. 1
Office Address P. O. Box 2475, Pampa, Texas 79065
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10-18 1975
Application for plugging filed 10-18 1975
Application for plugging approved 10-18 1975
Plugging commenced 10-18 1975
Plugging completed 10-18 1975
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4475 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Surface	413	8-5/8"	405	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 700', plug, 70 sx cement;
Fluid to 400', plug, 20 sx cement;
Fluid to 40', plug, 1/2 sack hulls, 10 sx cement.

D N B DRILLING, INC. (If a different location is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address 701 First National Building
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF _____, SS.
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *James L. Donelson*
701 First National Building, Wichita, Ks.

SUBSCRIBED AND SWORN TO before me this 30th day of October 1975

My commission expires August 25, 1976

Ella Priess
Ella Priess Notary Public.

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1975
CONSERVATION DIVISION
Wichita, Kansas

15-135-21101-0000

DRILLERS' LOG

SIDWELL OIL & GAS CO.
No. 1 Slagle
C NW SE, Sec. 5-20S-24W
Ness County, Kansas

Elev: 2368 K.B.

Commenced: 10-10-75
Completed: 10-18-75

Surface: 405' of 8-5/8"
cemented w/275 sx common
cement, 2% Gel, 3% cc.
10-10-75

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 413
Shale	413 - 1017
Blaine Anhydrite	1017 - 1026
Shale & Sand	1026 - 1455
Shale & Red Bed	1455 - 1632
Anhydrite	1632 - 1678
Shale	1678 - 2255
Shale & Lime	2255 - 2455
Lime & Shale	2455 - 4060
Lime	4060 - 4475 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 30th day of October 1975.

Ella Priess
Ella Priess, Notary Public

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976