

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-30178-00-00
Spot: CSENE Sec/Twnshp/Rge: 13-20S-23W
554 feet from S Section Line, 554 feet from E Section Line
Lease/Unit Name: BETZ C Well Number: 2
County: NESS Total Vertical Depth: 4323 feet

Operator License No.: 31629
Op Name: NASH OIL & GAS, INC.
Address: P. O. BOX 8747
PRATT, KS 67124

Conductor Pipe: Size feet: #140.50
Surface Casing: Size 8.625 feet: 248 WITH 175 SX CMT
Production: Size 5.5 feet: 4323 WITH 150 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 12/11/2002 11:15 AM

Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 4200' WITH 4 SX CMT. PERFORATE AT 800' & PUMP 150 SX CMT. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER

WitnessType: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 12/11/2002 12:15 PM

KCC Agent: MICHAEL MAIER

Actual Plugging Report:


OPEN HOLE AT 4323'. SANDED TO 4200' WITH 4 SX CMT. PERFORATED AT 800' & PUMPED 150 SX CMT. MAXIMUM PRESSURE 1200#. SHUT IN WITH 500#. TIED ONTO BACKSIDE AND PRESSURED TO 800# AND HELD.

RECEIVED
DEC 24 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

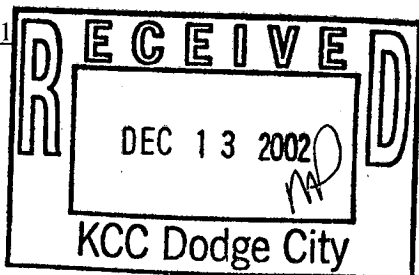

Signed

Michael Maier

(TECHNICIAN)

INVOICED

DATE 12-24-02

WV. NO. 2003060983

Form 18-27