

ORIGINAL

SIDE ONE

7/21/90
6/21/90
~~RELEASED~~
3 AUG 21 1991

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY
DESCRIPTION OF WELL AND LEASE

Operator: License # 3988
Name SLAWSON EXPLORATION COMPANY, INC.
Address 104 S. BROADWAY
City/State/Zip WICHITA, KANSAS 67202

Purchaser NA

Operator Contact Person Jim Remsberg
Phone (316) 263-3201

Contractor: License # 6039
Name J. D. DRILLING, INC.

Wellsite Geologist KIM SHOEMAKER
Phone (316) 682-1537

Designate Type of Completion
 New Well Re-Entry Workover
 Oil SWD Temp Abd STATE CORPORATION COMMISSION
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply etc.)

If OWWO: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method:
 Mud Rotary Air Rotary Cable
5-31-89 6-09-89
Spud Date Date Reached TD Completion Date
4645'
Total Depth PBD

Amount of Surface Pipe Set and Cemented at 381 feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set feet
If alternate 2 completion, cement circulated from feet depth to w/ SX cmt
Cement Company Name
Invoice #

API NO. 15-171-20-387-00-03
County SCOTT FROM CONFIDENTIAL

3640 Ft North from Southeast Corner of Section
3640 Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)


Lease Name RAMSEY "R" Well # 1

Field Name Wildcat

Producing Formation

Elevation: Ground 2920 2925 KB

Section Plat

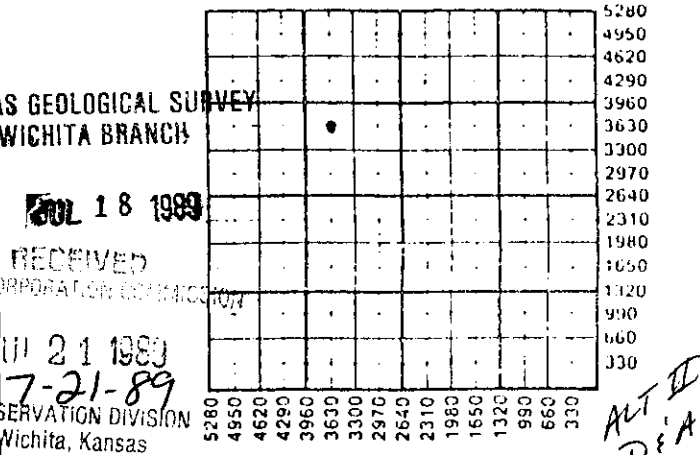

WATER SUPPLY INFORMATION

Disposition of Produced Water: Disposal
Docket # Repressuring

Questions on this portion of the ACO-1 call:

Water Resources Board (913) 296-3717
Source of Water:
Division of Water Resources Permit # 19316
Groundwater Ft North from Southeast Corner (Well) Ft West from Southeast Corner of Sec Twp Rge East West
Surface Water Ft North from Southeast Corner (Stream, pond etc) Ft West from Southeast Corner Sec Twp Rge East West
Other (explain) (purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on slide two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature James C. Remsberg
Title James C. Remsberg, Operations Mgr Date 06-27-89

Subscribed and sworn to before me this 27th day of June 1989
Notary Public Elizabeth Cochran

Date Commission Expires



K.C.C. OFFICE USE ONLY
 Letter of Confidentiality Attached
 Wireline Log Received
 Drillers Timelog Received
Distribution
KCC SWD/R&P NGPA
 KGS Plug Other (Specify)

Sec. 11, Twp 18 Rge. 31 W

ORIGINAL

CONFIDENTIAL

SIDE TWO

Operator Name SLAWSON EXPLORATION COMPANY, INC. Lease Name RAMSEY "R" Well # 1

Sec. 11 Twp. 18S Rge. 31 East West

County SCOTT

RELEASED

AUG 21 1991

WELL LOG

FROM CONFIDENTIAL

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken [X] Yes [] No
Samples Sent to Geological Survey [X] Yes [] No
Cores Taken [] Yes [X] No

Formation Description [X] Log [] Sample

DST #1 4282'-4370', 30-20-20-20, wk bl to no bl. Rec: 10' drlg mud. IFP 42-42, FFP 44-44, ISIP 56, FSIP 50.
DST #2 4400'-4482', 30-20-20-20, wk bl to no bl. Rec 5' drlg mud. IFP 40-40, FFP 44-44, ISIP 56, FSIP 48.
DST #3 4480'-4562', 30-20-20-20, wk bl to no bl. Rec: 20' drlg mud. IFP 94-74, FFP 109-79, ISIP 833, FSIP 695.

Name Top Bottom
ELEVATION: 2920 GR 2925 KB

FORMATION DATA: (log)

Table with 2 columns: Formation Name, Depth (ft). Includes Anhy, B/Anhy, Wab, Heeb, Lans, Mun Cr, Stk, B/KC, Marm, Alta "b", Paw, FS, L/Cher, JZ, LTD.

CASING RECORD [] New [] Used
Report all strings set-conductor, surface, intermediate, production, etc.

Table with 8 columns: Purpose of String, Size Hole Drilled, Size Casing Set (In O.D.), Weight Lbs/Ft., Setting Depth, Type of Cement, #Sacks Used, Type and Percent Additives.

PERFORATION RECORD

Table with 3 columns: Shots Per Foot, Specify Footage of Each Interval Perforated, Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used) Depth.

TUBING RECORD Size Set At Packer at Liner Run [] Yes [] No

Date of First Production Producing Method [] Flowing [] Pumping [] Gas Lift [] Other (explain).....

Table with 5 columns: Oil, Gas, Water, Gas-Oil Ratio, Gravity. Includes Estimated Production Per 24 Hours.

METHOD OF COMPLETION

Disposition of gas: [] Vented [] Sold [] Used on Lease
[] Open Hole [] Perforation
[] Other (Specify)
[] Dually Completed [] Conningled

Production Interval

ORIGINAL

ORIGINAL

6/13/90
7-21-91
RELEASED
15-171-20387-0000

AUG 21 1991

DRILLER'S WELL LOG

FROM CONFIDENTIAL

DATE COMMENCED: 5-31-89

SLAWSON EXPLORATION COMPANY, INC.

DATE COMPLETED: 6-09-89

NW SE NW Sec. 11-18S-31W
SCOTT COUNTY, KANSAS
RAMSEY "R" #1

0 - 381 Surface
381 - 1470 Clay & Shale
1470 - 2006 Sand
2006 - 3005 Shale
3005 - 3785 Lime & Shale
3785 - 3960 Lime
3960 - 4155 Lime & Shale
4155 - 4312 Lime
4312 - 4370 Lime & Shale
4370 - 4435 Lime
4435 - 4482 Lime & Shale
4482 - 4595 Lime
4595 - 4645 Lime & Shale
4645 R.T.D.

ELEVATION: 2920 GR 2925 KB

FORMATION DATA: (log)

Anhy 2260 (+665)
B/Anhy 2277 (+648)
Wab 3505 (-580)
Heeb 3883 (-958)
Lans 3930 (-1005)
Mun Cr 4111 (-1186)
Stk 4205 (-1280)
B/KC 4290 (-1365)
Marm 4319 (-1394)
Alta "b" 4360 (-1435)
Paw 4417 (-1492)
FS 4460 (-1535)
L/Cher 4492 (-1557)
JZ 4522 (-1628)
LTD 4646 (-1721)

SURFACE CASING:

8 5/8" set @ 381' W/195 sx.
60/40 Pozmix, 2% GEL, 3% CC

KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH
JUN 13 1989

AFFIDAVIT

RECEIVED
STATE CORPORATION COMMISSION

JUN 13 1989


CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
SS
COUNTY OF BARTON)

L. D. DAVIS of lawful age, does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

L. D. Davis
L. D. Davis

Subscribed and sworn to before me this 12th day of June, 1989.



My Commission expires: 5-20-93

Bessie M. DeWerff
Notary Public: Bessie M. DeWerff