

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Scott

County. Sec. 14 Twp. 18S Rge. (E) 31 (W)

Location as "NE/CNW/SW" or footage from lines C NW/4

Lease Owner N-Ren Corporation

Lease Name Hammeke Well No. 1

Office Address 256 McCullough St. Cincinnati, Ohio

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 8/12/75 19

Application for plugging filed 8/12/75 19

Application for plugging approved 8/12/75 19


Plugging commenced 8/12/75 19

Plugging completed 8/12/75 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

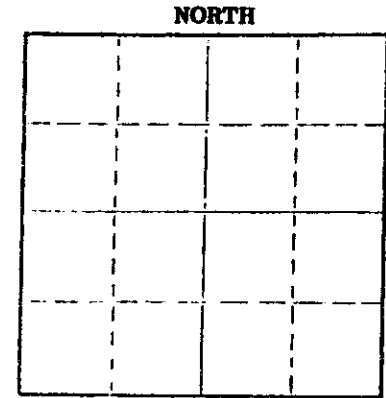

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2820 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface clay, sand shale		0	396	8 5/8	396	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st plug - @ 900' w/70 sx  
2nd plug - @ 375 w/20 sx  
3rd plug - @ 40 w/10 sx  
Complete at 7:05 AM August 12, 1975

12-17-75

Name of Plugging Contractor Gabbert-JONES, INC. (If additional description is necessary, use BACK of this sheet)

Address 830 Sutton Place, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.

Gabbert-Jones, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gabbert-Jones, Inc. by Jack W. Gabbert

Sworn to before me this 16 day of December, 1975

Nov. 29, 1979 Notary Public



GABBERT-JONES, INC.  
 WICHITA, KANSAS  
 DRILLERS' WELL LOG

Harmeke #1  
 C-NW/4 Sec 14-18S-31W  
 Scott County Kansas

Commenced: 8-7-75

Completed: 8-12-75

OPERATOR: M-REM CORPORATION

Depth From	to	Formation	Remarks
0	40	Surface Clay	Ran 10 jts of used 28#
40	70	Sand	8 5/8" csg set @ 396' Cemented
70	1112	Shale	w/275 sbs Common 2% Gel
1112	1720	Lime-Shale	3% CC PD @ 4:15 p.m. 8-7-75
1720	1810	Shale-Shells	
1810	1980	Sand	
1980	2255	Shale-Shells	
2255	2295	Anky	
2295	2494	Shale	
2494	2820	Lime	
	2820 - TD		DRY & ABANDONED

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-NW/4 Sec 14-18S-31W, Scott County, Kansas to the best of my knowledge and belief.

*James S. Sutton II*  
 JAMES S. SUTTON II

STATE OF KANSAS )  
 ) SS  
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 18th day of August, 1975, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

*Elizabeth J. Edwards*  
 ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979.

