


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

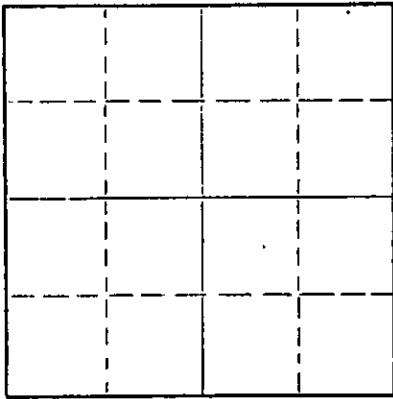

Locate well correctly on above
Section Plat

Ellis County, Sec. 35 Twp. 11 Rge. 19 (E) (W)
Location as "NE/CNWxSWx" or footage from lines SW NW NE
Lease Owner Rains & Williamson Oil Company
Lease Name Vine Well No. A1
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5/4/67 _____ 19____
Plugging completed 5/9/67 _____ 19____
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3686 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	187'	none
				5-1/2"	3682'	193'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole, sanded hole to 3665', set 5 sacks of cement. Shot pipe at 397', 299', 198'. Pulled 6 joints. Set rock bridge at 200'. Plugged hole with 3 yards of ready mix.

PLUGGING COMPLETE.

RECEIVED
MAY 14 1967
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of May, 19 67.

My commission expires February 15, 1971

Margaret Drecker
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas


15-051-01356-0000

Company- C-G DRIG. & DARBY OIL & OIL TRADING
 Farm- Vine "A" No. 1

SEC. 35 T. 11 R. 19W
 SW NW NE

Total Depth. 3686'
 Comm. 5-18-57 Comp. 6-28-57
 Shot or Treated.
 Contractor. C-G Drig.
 Issued. 1-3-59

County Ellis
 KANSAS



Elevation. 2128' RB

CASING:
 8 5/8" 187.82 cem w/150 sx.
 5 1/2" 3682' cem w/75 sx.

Production. 232 BOPD

Figures Indicate Bottom of Formations.

shale, shells	187
shale, shells	760
sand, shale	1160
red bed	1452
Anhydrite	1489
shale, shells	2140
shale, lime	3000
lime, shale	3419
lime	3645
Arbuckle	3686
Total Depth	

TOPS: SCOUT	
Topeka	3127
Heebner	3350
Lansing	3392
Base Kansas City	3606
Simpson	3652
Arbuckle	3681

REGISTERED
 STATE CORPORATE COMMISSION

APR 18 1967

REGISTRATION DIVISION
 Topeka, Kansas