

15.165.20063.0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Rush County, Sec. 31 Twp. 16S Rge. 16 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines SW SW SW

Lease Owner Frontier Oil Company

Lease Name Douglass Well No. 1

Office Address 1720 Wichita Plaza - Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D & A

Date well completed October 6 19 67

Application for plugging filed October 6 19 67

Application for plugging approved October 6 19 67


Plugging commenced October 6 19 67

Plugging completed October 6 19 67

Reason for abandonment of well or producing formation D&A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

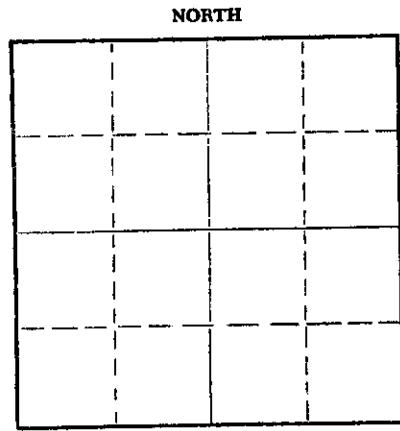

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker

Producing formation Depth to top Bottom Total Depth of Well 3614' Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	@218.30	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled pipe with mud pumped 125 sx 50.50 pozmix in hole.

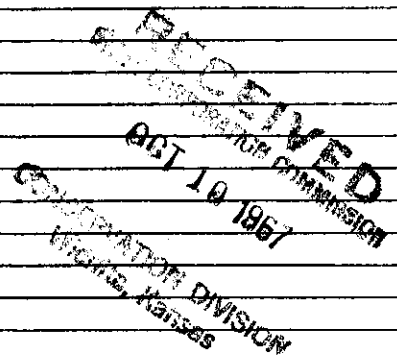

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company

Address 1720 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Maxine V. Starr (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr

(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of October, 1967

Betty M. Maloney Notary Public.

My commission expires 3-22-71

K-165-20063-0000

No. 1 Douglass

DRILLERS LOG

CASING RECORD: 8 5/8" @ 218.30  
w/135 sx. cement

COMPANY: Frontier Oil Company

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: September 26, 1967

COMPLETED: October 6, 1967

DESCRIPTION: SW SW SW  
31-16S-16W  
Rush Co., Kansas

ELEVATION:

TOTAL DEPTH 3614'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Cellar & Clay	0	35	
Post Rock	35	85	
Shale	85	220	
Shale & Red Bed	220	530	
Sand	530	740	
Shale & Shells	740	770	
Red Bed & Shale	770	1124	
Anhydrite	1124	1160	
Shale & Shells	1160	1880	
Shale w/Lime	1880	2315	
Lime	2315	2390	
Shale & Lime	2390	3052	
Lime	3052	3614	

RECEIVED  
OCT 10 1967  
CONFIRMATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

FRONTIER OIL COMPANY

*Maxine V. Starr*  
Maxine V. Starr

Subscribed and sworn to before me this 9th day of October, 1967.

*Betty M. Maloney*  
Notary Public

My Commission Expires:

3-22-71