


KANSAS STATE CORPORATION COMMISSION
CONSERVATION DIVISION AGENT'S REPORT

J. P. Roberts
Assitant Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

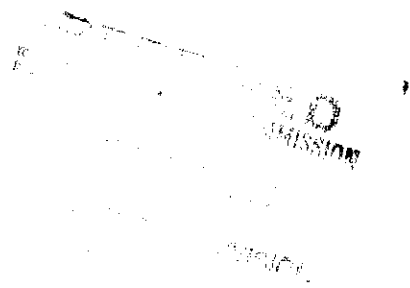

Operator's Full Name A. D. Mc/Kelvy

Complete Address: 48 Lloyd Drive, Atherton, California

Lease Name Crozier Well No. # 1

Location 6 SW/4 Sec. 6 Twp. 21 Rge. 32 (W) (W)

County Finney Total Depth 2707'

Abandoned Oil Well Gas Well X Input Well SWD Well D & A

Other well as hereafter indicated:

Plugging Contractor: Southwest Casing Pulling Company Inc.

Address: Box 364 Great Bend, Kansas License No. 399

Operation Completed: Hour 5 PM. Day 18 Month 9 Year 62

The Above well was plugged as follows:

8 5/8" 324' Circulated w/cement. 5 1/8" 2707' Cemented w/300 sax.

Perforations 2673' to 2681'

Plug bottom w/ sand and 5 sax. cement.

Heavy mud to 300'

Plug and 35 sax. cement 300' to 200'

Heavy mud 200' to 45'

Plug and 15 sax. cement 45' to surface.

(Company Pump) Pulled 1520' 5 1/8" Pipe.

I hereby certify that the above well was plugged as herein stated.

INVOICED

Signed: [Signature]
Well Plugging Supervisor

DATE 9/20/62

INV. NO. 5429-W