

15165-20489-0000


FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Rush County, Sec. 26 Twp. 16 Rge. 18 (E) (W) X

Location as "NE/CNW/SW" or footage from lines C S/2 NE/4
Lease Owner Misco United Supply Inc.
Lease Name Leo Kreutzer Well No. #1
Office Address Misco Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed 10-22-74 19____
Application for plugging approved _____ 19____
Plugging commenced 10-28-74 19____
Plugging completed 11-6-74 19____
Reason for abandonment of well or producing formation _____

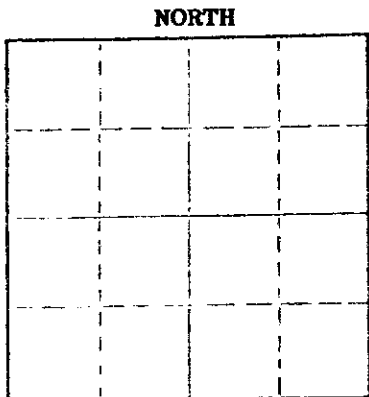

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3400' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3399'	2520.19'
				8 5/8"	243'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3000'. Mixed and ran 4 sacks cement thru dump bailer.
Squeezed hole with 3 sacks hulls - 20 sacks gel. Released plug and displaced with 125 sacks 50/50 pozmix 6% gel.

RECEIVED
STATE CORPORATION COMMISSION
NOV 8 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364 Great Bend, Kansas
(Address)

Subscribed and sworn to before me this 7 day of November, 19 74

My commission expires 24 October 1976
Sidney D. Miller
Notary Public.



15-165-20409-0000

DRILLERS LOG

No. 1 Leo Kreutzer

CASING RECORD:

8 5/8" @ 243'
w/160 sx cement

4 1/2" @ 3399'
w/175 sx cement

TOTAL DEPTH: 3400'

COMPANY: J. A. Allison

CONTRACTOR: Red Tiger Drilling Company

COMMENCED: September 6, 1971

COMPLETED: September 15, 1971

DESCRIPTION:

C S/2 NE/4
26-16S-18W
Rush County,
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Hard rock & shale	0	165	
Shale & shells	165	243	
Shale	243	600	
Sand	600	820	
Shale (Red Bed)	820	1174	
Anhydrite	1174	1212	
Shale	1212	1505	
Shale & shells	1505	1885	
Shale & lime	1885	2280	
Lime	2280	2360	
Lime & shale	2360	3056	
Lime	3056	3400	


RECEIVED
STATE CORPORATION COMMISSION
DEC 21 1973
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice

Subscribed and sworn to before me this 17th day of September, 1971.



Virginia K. Albert
Notary Public

My Commission Expires: July 23, 1974