

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-137-20618-00-00
Spot: N2NWNENE Sec/Twnshp/Rge: 26-3S-24W
120 feet from N Section Line, 990 feet from E Section Line
Lease Name: HARTING UNIT Well #: 1
County: NORTON Total Vertical Depth: 3843 feet

Operator License No.: 9860
Op Name: CASTLE RESOURCES, INC.
Address: BOX 87
SCHOENCHEN, KS 67667

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	241		180 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 10/17/2012 12:00 AM
Plug Co. License No.: 34743 Plug Co. Name: WHITE KNIGHT DRILLING LLC
Proposal Rcvd. from: DARREL ANDERSON Company: WHITE KNIGHT DRILLING LLC Phone: _____

Proposed Plugging Method: Ordered 230sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: PAT STAAB Witness Type: NONE
Date/Time Plugging Completed: 10/17/2012 9:00 PM KCC Agent: PAT STAAB

Actual Plugging Report:

10/12/2012 Drilling out under Surface pipe.
Granite Wash
1st plug @3760 w/25 sx
2nd plug @2047 w/25 sx
3rd plug @1345 w/100 sx
4th plug @ 310w/40 sx
5th plug @40 w/10 sx

Rathole 30 sx

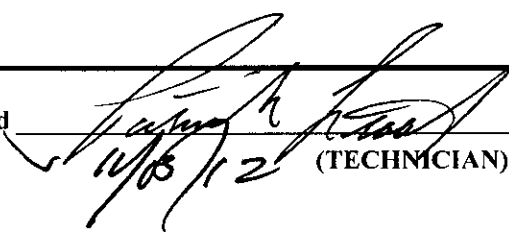
Perfs:

Remarks: SOS

Plugged through: DP

RECEIVED
NOV 02 2012
KCC WICHITA

District: 04

Signed  (TECHNICIAN)

CM

OCT 24 2012