

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-095-01148-00-00  
Spot: SWNWNW Sec/Twnshp/Rge: 24-30S-8W  
4290 feet from S Section Line, 4950 feet from E Section Line  
Lease Name: TJADEN A (WSU 10) Well #: 2  
County: KINGMAN Total Vertical Depth: 4350 feet

Operator License No.: 33999  
Op Name: LINN OPERATING, INC.  
Address: 600 TRAVIS STE 5100  
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4349	2355	200 SX
SURF	8.625	195		200 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/17/2011 12:00 AM

Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: \_\_\_\_\_

Proposed Plugging Method: SAND TO 4220' & 5 SKS, REC. PIPE, 35 SX 1200', 35 SX 700', CIRCULATED 250'-0'.

Plugging Proposal Received By: JEFF KLOCK Witness Type: PARTIAL  
Date/Time Plugging Completed: 10/19/2011 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE SANDED BACK TO 4209' & CAPPED WITH 5 SKS CEMENT. RECOVERED CASING FROM 2355' & PULLED TO 1200', WHERE 35 SX OF CEMENT WAS SPOTTED. PULLED CASING TO 700' WHERE 35 SX OF CEMENT WAS SPOTTED. PULLED CASING TO 250' & CIRCULATED CEMENT TO SURFACE.

Perfs:

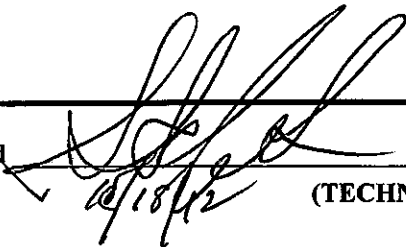
Top	Bot	Thru	Comments
4271	4276		CSG

RECEIVED  
OCT 05 2012  
KCC WICHITA

Remarks: QUALITY WELL SERVICE 60/40 4% GEL

Plugged through: CSG

District: 02

Signed  (TECHNICIAN)