

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-095-01154-00-00  
Spot: SWNWNW Sec/Twnshp/Rge: 25-30S-8W  
4290 feet from S Section Line, 4950 feet from E Section Line  
Lease Name: TJADEN D (WSU 6 1) Well #: 2  
County: KINGMAN Total Vertical Depth: 4450 feet

Operator License No.: 33999  
Op Name: LINN OPERATING, INC.  
Address: 600 TRAVIS STE 5100  
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4449		200 SX
SURF	8.625	195		250 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/25/2011 12:00 AM

Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: \_\_\_\_\_

Proposed Plugging Method: SAND TO 4280' & 5 SKS CEMENT.

Plugging Proposal Received By: JEFF KLOCK

Witness Type: NONE

Date/Time Plugging Completed: 11/04/2011 5:30 PM

KCC Agent: STEVE VANGIESON

Actual Plugging Report:

BRIDGE AT 980', CLEANED OUT HOLE WITH MILL ON TUBIN & POWER SWIVEL TO 1240'. PERF'D CASING AT 1240' & PUMPED 100 SKS CEMENT. NO CIRCULATION. DIDN'T TAG CREMENT. RAN TUBING BACK TO 1240' & PUMPED ANOTHER 100 SX CEMENT. DIDN'T TAG ANY CEMENT. PUMP 20 SKS GEL, 3 SKS CEDAR FIBER AND GOT CIRCULATION. PUMPED 75 SX CEMENT, 150# HULLS. WAITED 2 HOURS TAGGED CEMENT AT 960'. RAN TUBING TO 700' & PUMPED 35 SX CEMENT. TAGGED CEMENT @ 202'. RAN TUBING TO 200' & CIRCULATED CEMENT TO SURFACE. RAN 1" TUBING TO 200' & PUMPED 60 SX CEMENT.

Perfs:

Top	Bot	Thru	Comments
4338	4348		CSG

RECEIVED  
OCT 05 2012


Remarks: QUALITY WELL SERVICE 60/40 4% GEL

KCC WICHITA

Plugged through: TBG

District: 02

Signed

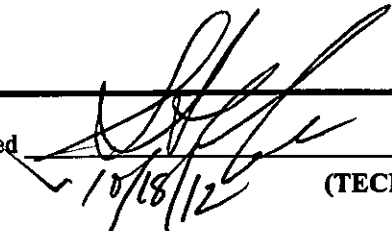

(TECHNICIAN)