

15-165-20361-0000

Rec. 12-21-73


FORM CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Rush County, Sec. 23 Twp. 16 Rge. 18 (E) (W) x

Location as "NE/CNWSW" or footage from lines C of W/2 NW  
Lease Owner J. A. Allison  
Lease Name Dechant Well No. #2  
Office Address Suite 748, 200 W. Douglas Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 11-4-74 19  
Plugging completed 11-7-74 19  
Reason for abandonment of well or producing formation

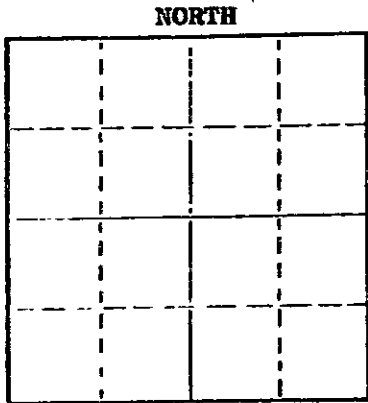

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3595' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"	3406'	Plug only
				8 5/8"	241'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Squeezed 4 1/2" casing with 1 sacks hulls and 2 sacks gel. Displaced with 100 sacks 50/50 pozmix with 6% gel.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 GreatBend, Kansas

STATE OF Kansas COUNTY OF Barton ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box :364 GreatBend, Kansas (Address)

Sworn to before me this 7 day of November 19 74  
Sidney D. Miller  
Notary Public.



K.1165-20361-0000

DRILLERS LOG

No. 2 Dechant

CASING RECORD:

8 5/8" @ 241'  
w/165 sx cement

4 1/2" @ 3406'  
w/200 sx cement

TOTAL DEPTH: 3595'

COMPANY: J. A. Allison

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: October 25, 1970

COMPLETED: November 3, 1970

DESCRIPTION:

C W/2 NW/4  
23-16S-18W  
Rush County,  
Kansas

ELEVATION:

FORMATION

FROM

TO

Surfaca hole	70	70
Sand & Shale	70	960
Shale	960	1171
Anhydrite	1171	1207
Shale & Shells	1207	1575
Shale & Lime	1575	1935
Lime & Shale	1935	3034
Lime	3034	3595

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 21 1973  
CONSERVATION DIVISION  
Wichita, Kansas


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice  
Jim Farrice

Subscribed and sworn to before me this 9<sup>th</sup> day of November, 1970.

Juguenin & Albert  
Notary Public



Commission Expires:

July 23, 1974