

API NUMBER 15-135-22,982-0000

LEASE NAME Slagle

TYPE OR PRINT
 NOTICE: Fill out completely
 and return to Cons. Div.
 office within 30 days.

WELL NUMBER 1

660 Ft. from S Section Line

3630 Ft. from E Section Line

SEC. 30 TWP. 20S RGE. 25W (EXX) (W)

COUNTY Ness

LEASE OPERATOR Bird Energy, Inc.

Box 1612

ADDRESS Dodge City, KS 67801

PHONE# (316) 227-6041 OPERATORS LICENSE NO. 6574

Date Well Completed 1-17-86

Character of Well dry

Plugging Commenced 1-17-86

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 1-17-86

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? Dodge City office

Is ACO-1 filed? _____ If not, is well log attached? yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4440

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
surface	shale	0	259	8-5/8"	258	none
	cemented with 150	60/40	posx.	2%gel, 3%cc.		plug down at 7:30p.m.
	1-10-86 by Halliburton,		cement did circ.			

Describe in detail, the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Plugged as follows by B.J. Titan using 60/40 pos, 6%gel;
 15 sx in rat hole: 50 sx @ 1630'; 80 sx @ 1345'; 50 sx @ 570';
 50 sx @ 290'; 10 sx @ 40' w/solid bridge plug

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor J. W. Drilling Co., Inc. License No. 5137

Address 200 E. First, Suite 500
Wichita, KS 67202

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

Jon T. Williams, Jr.


(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]
 (Address) 200 E. First, Suite 500
Wichita, KS 67202

SUBSCRIBED AND SWORN TO before me this 17th day of January, 19 86

Gerry M. Stewart
 Notary Public

Expires: 1-14-89



STATE CORPORATION COMMISSION

JAN 27 1986 Form CP-4
 Revised 08-84
 CONSERVATION DIVISION
 WICHITA, KANSAS

DRILLERS LOG

15-135-22982-0000

OPERATOR: Bird Energy, Inc.
 Box 1612
 Dodge City, KS 67801

LEASE: Slagle No. 1
 W/2 SE SW of Sec. 30-20S-25W
 Ness County, Kansas

CONTRACTOR: J. W. Drilling Co., Inc.
 200 E. First, Suite 500
 Wichita, Kansas 67202

COMMENCED: January 10, 1986

COMPLETED: January 17, 1986

RTD: 4440'


SURFACE CASING: 8-5/8" set @258' w/150 sx 60/40 pos, 2% gel, 3% cc

PRODUCTION CASING: n/a

Dirt.....	0	-	45
Grey Shales.....	45	-	385
Shales.....	385	-	1100
Sands.....	1100	-	1300
Lime & Shale.....	1300	-	1600
Anhydrite.....	1600	-	1628
Shale & Lime.....	1628	-	3210
Lime.....	3210	-	3405
Lime & Shale.....	3405	-	4300
Lime.....	4300	-	4370
Lime & Shale.....	4370	-	4440


STATE OF KANSAS
 COUNTY OF SEDGWICK

I, Jon T. Williams, Jr., of J. W. Drilling Co., Inc., hereby state the above is an accurate log for the Slagle No. 1 for Bird Energy, Inc.

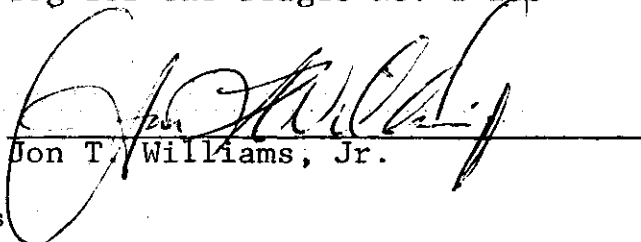

 Jon T. Williams, Jr.

Subscribed and sworn to me this
 17th day of January, 1986.



 Gerri M. Stewart Notary Public

My commission expires January 14, 1989.



RECEIVED
 STATE CORPORATION COMMISSION
 JAN 27 1986
 CONSERVATION DIVISION
 WICHITA, KANSAS