

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-119-10018-00-02 0002  
Spot: NESWNENW Sec/Twnshp/Rge: 2-33S-30W  
666 feet from N Section Line, 1979 feet from W Section Line  
Lease Name: STEVENS (MORROW) UNIT Well #: 203  
County: MEADE Total Vertical Depth: 5828 feet

Operator License No.: 32198  
Op Name: PETROSANTANDER (USA) INC.  
Address: 6363 WOODWAY DR STE350  
HOUSTON, TX 77057

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5573		
PKR	5.5	3678		
PROD	5.5	3649	2282	WITH 300 SX CMT
SURF	8.625	1600		WITH 735 SX CMT

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/15/2012 1:00 PM  
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC  
Proposal Rcvd. from: GORDON AUSTIN Company: PETROSANTANDER Phone: (620) 275-2388

Proposed Plugging Method: PLUG AT 1650' WITH 10 SX GEL & 50 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 60' WITH 25 SX CMT.

Plugging Proposal Received By: KENNY SULLIVAN WitnessType: NONE  
Date/Time Plugging Completed: 11/15/2012 6:30 PM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

CIBP @ 5573'. 1ST PLUG AT 1660' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 620' WITH 40 SX CMT. 3RD PLUG AT 65' WITH 35 SX CMT.

Perfs:

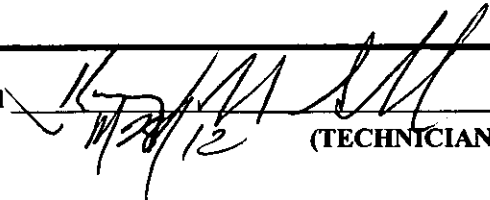
Top	Bot	Thru	Comments
5643	5684		

Remarks: USED 60/40 POZMIX 4% GEL BY CONSOLIDATED OIL WELL SERVICES.

Plugged through: TBG

District: 01

Signed

  
(TECHNICIAN)

RECEIVED

NOV 20 2012

KCC DODGE CITY

RECEIVED  
NOV 27 2012  
KCC WICHITA

*Handwritten initials*