

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-195-22635-00-00
Spot: NENENWSE Sec/Twnshp/Rge: 15-15S-22W
2410 feet from S Section Line, 1610 feet from E Section Line
Lease Name: PEARSON TRUST Well #: 1
County: TREGO Total Vertical Depth: 4288 feet

Operator License No.: 30742
Op Name: PALOMINO PETROLEUM, INC.
Address: 4924 SE 84TH ST
NEWTON, KS 67114

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1611		200 sx
PROD	5.5	4289		200 SX
SURF	8.625	216		150 SX
T1	2.875	4250		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/21/2012 10:00 AM
Plug Co. License No.: 6426 Plug Co. Name: EXPRESS WELL SERVICE & SUPPLY INC
Proposal Rcvd. from: _____ Company: EXPRESS WELL SERVICE & SUPPL Phone: (785) 735-9405

Proposed Plugging Method: Ordered 275 sx 60/40 pozmix 4% gel cement w/400# hulls and 21 sx gel.
Port collar @ 1611' w/200 sx cement.
Perforations @ 4194' - 4200'.

Plugging Proposal Received By: MARVIN MILLS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/21/2012 2:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 4194' and pumped 21 sx gel followed by 50 sx cement.
Pulled tubing to 1657' and pumped 178 sx cement. Good circulation of cement.
Pulled tubing out of hole and topped off casing with 12 sx cement. Hole standing full.
Tied on to back side and squeezed with 10 sx cement. Shut in pressure 200 psi.

Perfs:

Top	Bot	Thru	Comments
4194	4200		

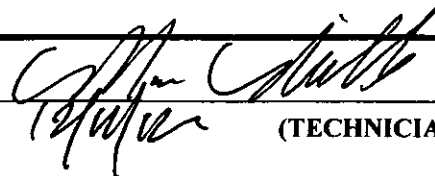
Remarks: SWIFT CEMENT TICKET # 22920

Plugged through: TBG

RECEIVED
DEC 03 2012
KCC WICHITA

District: 04

Signed


(TECHNICIAN)

CM

NOV 26 2012