

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-191-22419-00-00
Spot: NWNWNW Sec/Twnshp/Rge: 25-32S-4W
330 feet from N Section Line, 330 feet from W Section Line
Lease Name: EARLES Well #: 3
County: SUMNER Total Vertical Depth: 2981 feet

Operator License No.: 5039
Op Name: AGV CORP.
Address: PO BOX 377
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2979	2006	125 SX
SURF	8.625	259		185 SX
T1	2.375	2971		

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/26/2012 8:00 AM
Plug Co. License No.: 34227 Plug Co. Name: AMERICAN WELL SERVICE LLC
Proposal Rcvd. from: KENT ROBERTS Company: AMERICAN WELL SERVICE Phone: (316) 215-1683

Proposed Plugging Method: CIBP AT 2930' & 2 SKS. 35 SX 850', 35 SX 525', CIRCULATED 352-0'.

Plugging Proposal Received By: _____ Witness Type: NONE
Date/Time Plugging Completed: 10/26/2012 12:00 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERF WERE CAPPED WITH A CIBP SET AT 2930' & CAPPED 2 SKS. THE CASING WAS RECOVERED FROM 2006', AND PULLED TO 868' WHERE 35 SKS OF CEMENT WAS SPOTTED. PULLED CASING TO 524' & SPOTTED 35 SX CEMENT. PULLED CASING TO 352' & CIRCULATED CEMENT TO SURFACE.

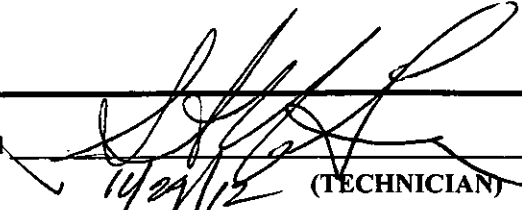
Perfs:

Top	Bot	Thru	Comments
2979	2981	CSG	OPEN HOLE

Remarks: BASIC SERVICES 60/40 4% GEL

Plugged through: CSG

District: 02

Signed:  (TECHNICIAN)

RECEIVED
NOV 28 2012
KCC WICHITA

✓